



# Single-Axis Tracked Bifacial System Results

Silvana Ayala Pelaez<sup>1</sup>, Chris Deline<sup>2</sup>, Peter Greenberg<sup>3</sup>,  
Josh Stein<sup>4</sup>, Raymond K. Kostuk<sup>1</sup>

[silvanaa@email.arizona.edu](mailto:silvanaa@email.arizona.edu)

# Outline

## Single-Axis Tracking Models

- View Factor
- RADIANCE Ray trace

## Results for:

- Klamath Falls, Oregon

## Closer look at:


- Adaptive Tracking Angle
- Edge brightening
- Torque tube shading

# Two open-source tracking models

## 1. View Factor model – 8760 hourly gain

BifacialVF software release


[github.com/NREL/bifacialvf](https://github.com/NREL/bifacialvf)

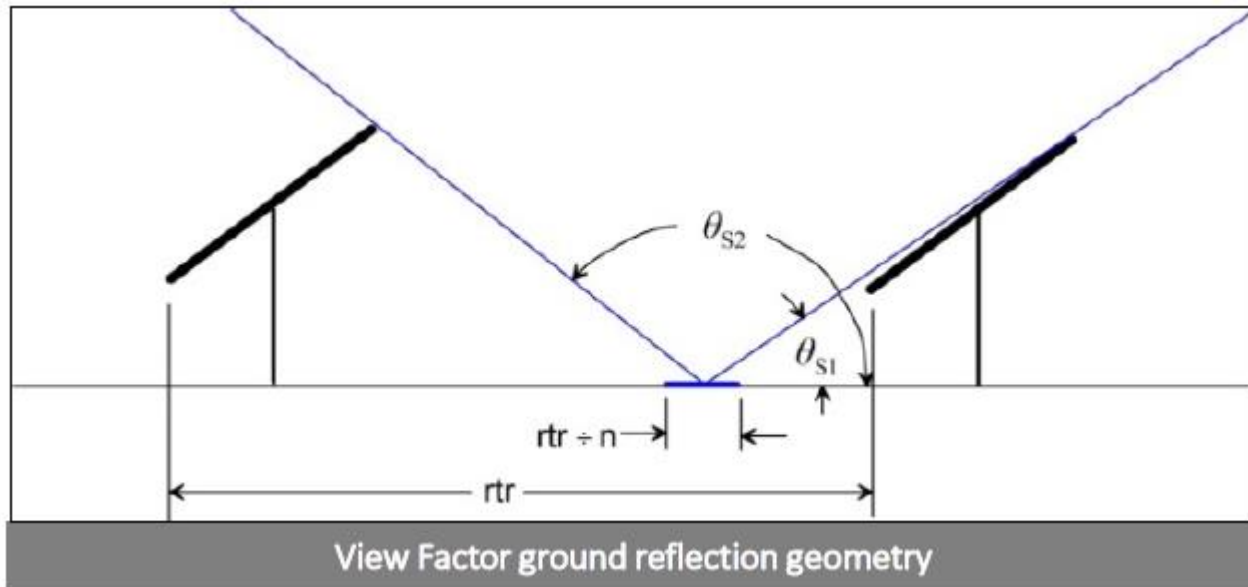

## 2. Ray Tracing – annual bifacial gain


Bifacial Radiance software release

[github.com/NREL/bifacial\\_radiance](https://github.com/NREL/bifacial_radiance)

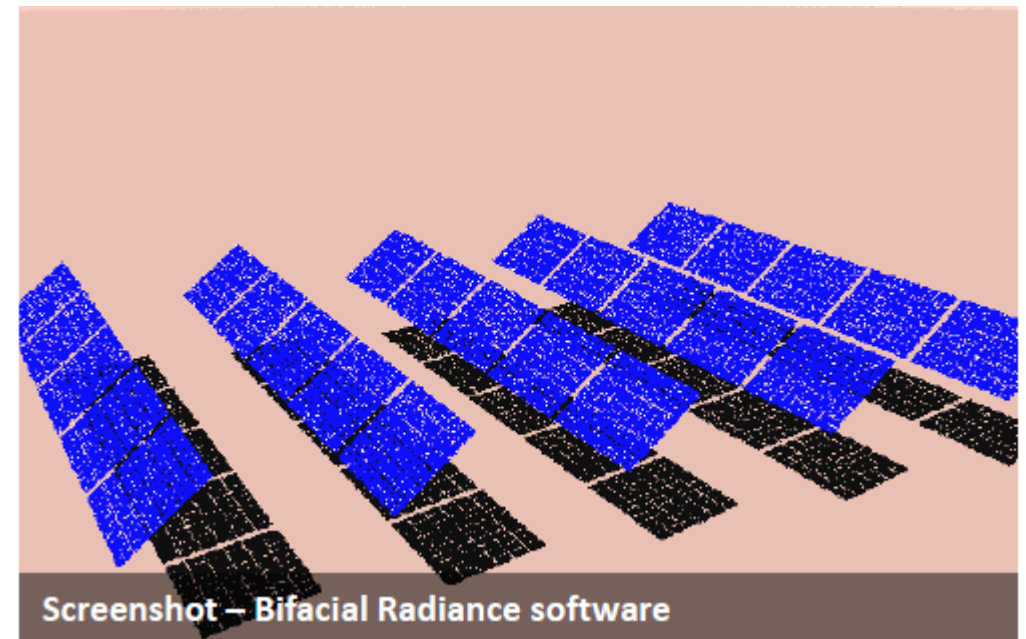

# Modeling Rear Irradiance

Image: <http://opsun.com/mounting-solutions/flat-roof/bifacial-pv-racking/>

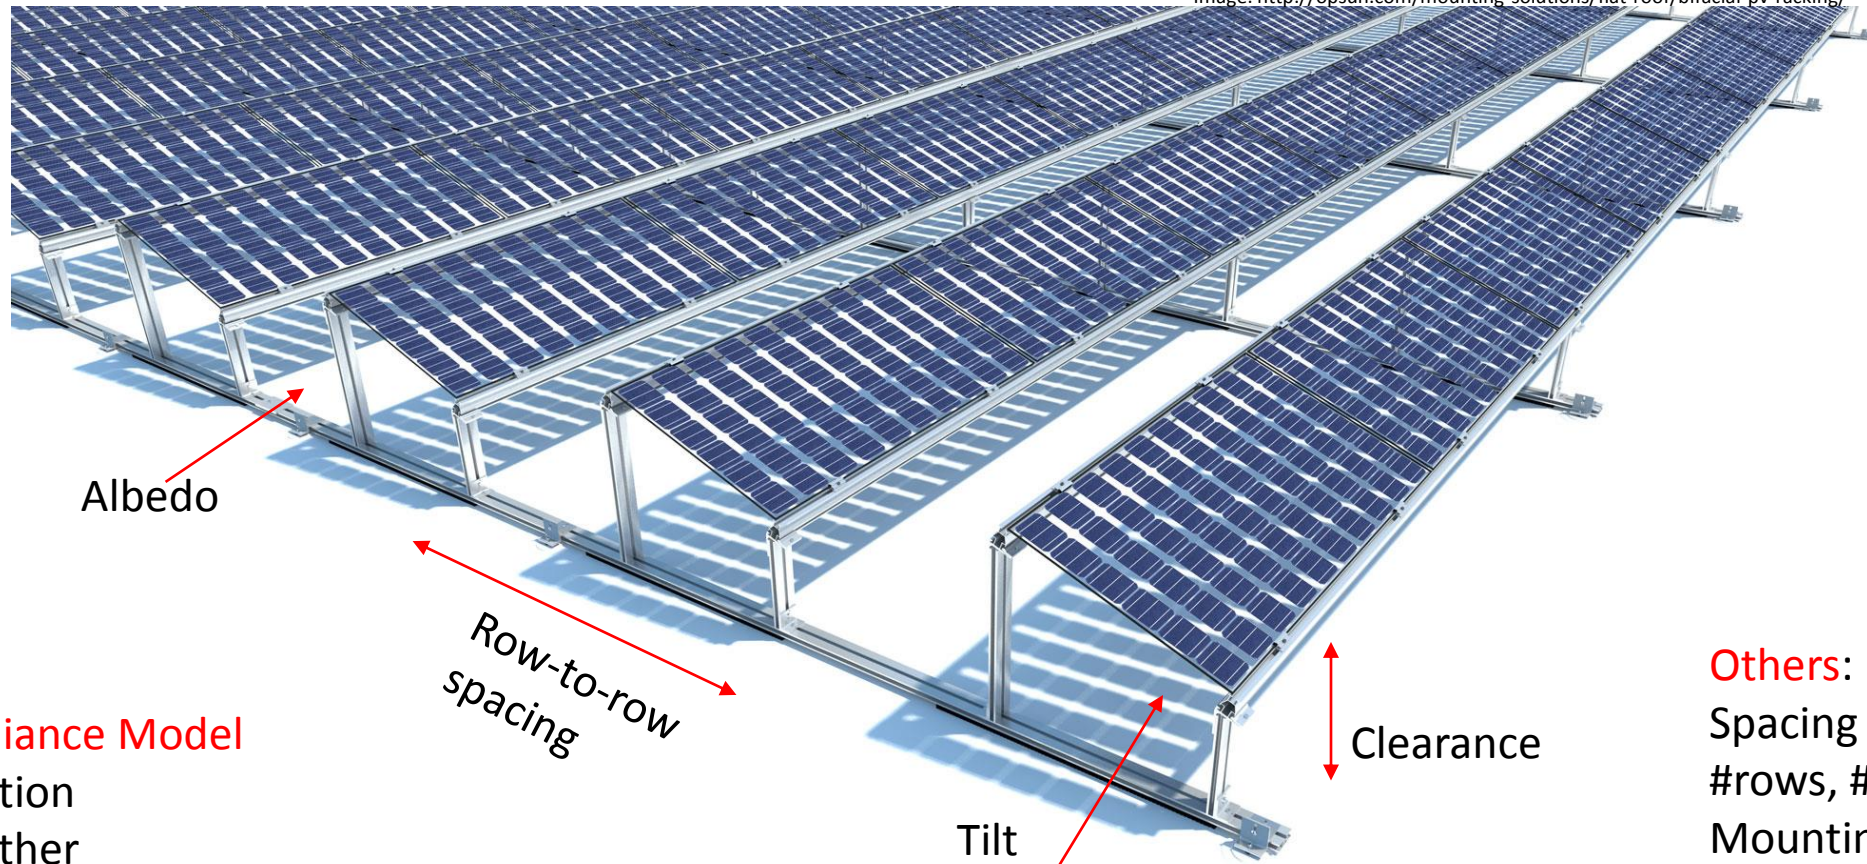

**Irradiance Model**  
Location  
Weather  
Sky Diffuse Model

**Others:**  
Spacing between cells  
#rows, #panels  
Mounting Structure  
Other scene elements


# Radiance: Ray-tracing software

**Complicated geometries possible**, including racking and terrain.

Radiance uses **backward ray-trace** to evaluate the irradiance ( $\text{W}/\text{m}^2$ ) at the modules

**Reduces complexity and run-time.**

Modules  $\ll$  Sky

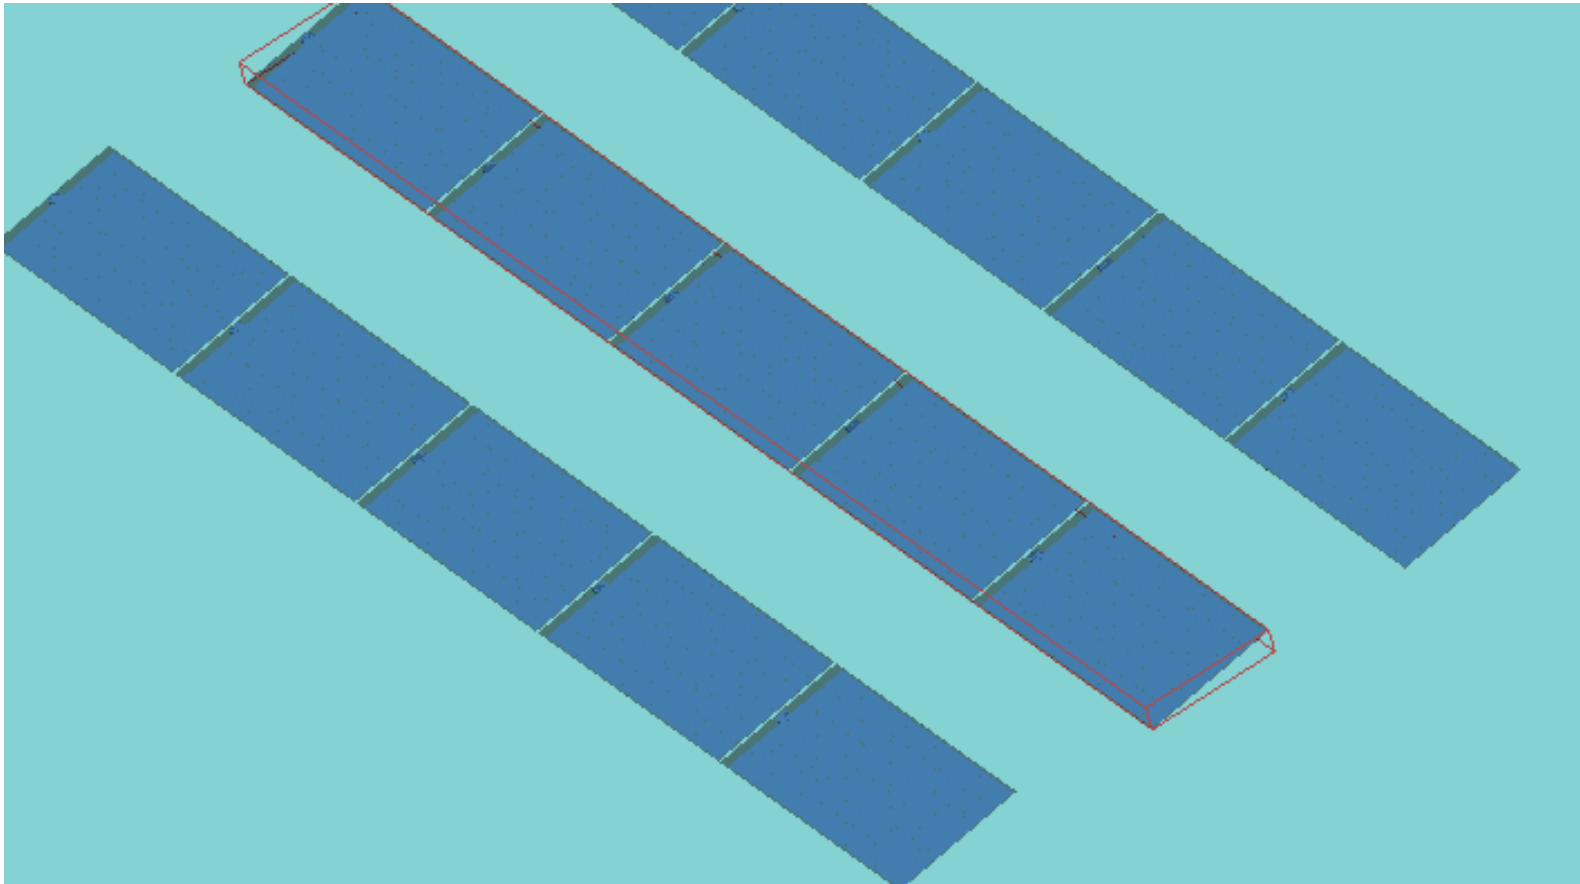

# Parameters & Metrics

Ground Coverage Ratio



$$GCR = \frac{\text{CollectorWidth}}{\text{row-to-row}}$$

Normalized Axis Clearance

$$H = \frac{\text{axis height}}{\text{CollectorWidth}}$$


Bifacial Gain (Irradiance)

$$BG_{E,Model} = \varphi_{Pmp} \times \frac{G_{rear}}{G_{front}} (1 - \eta_{loss})$$

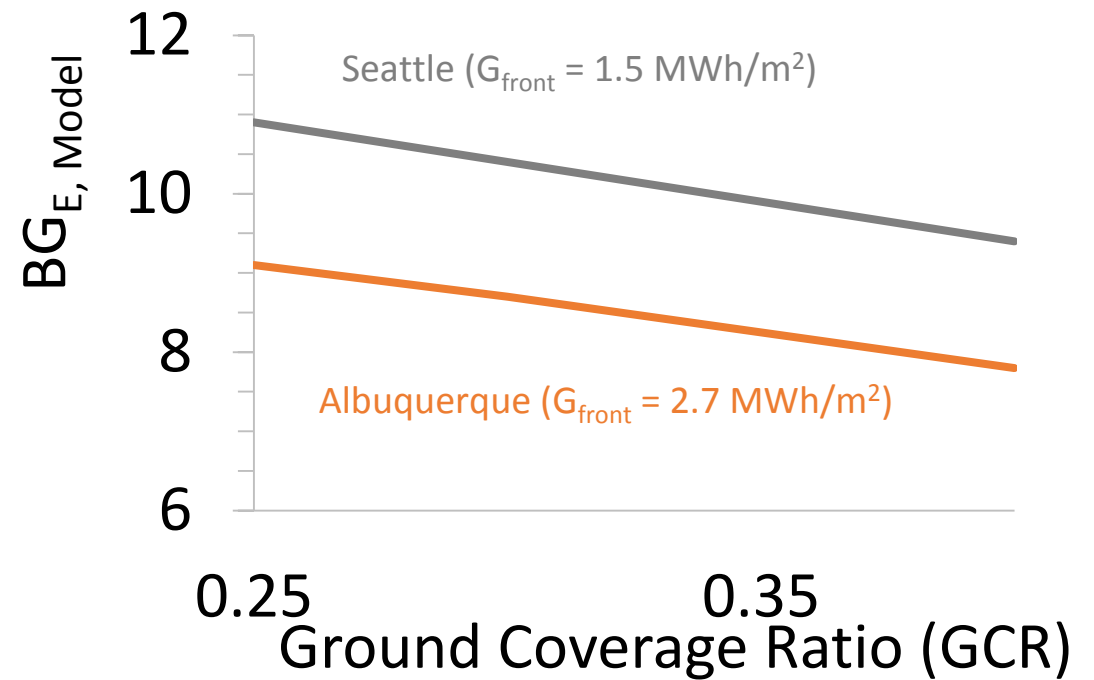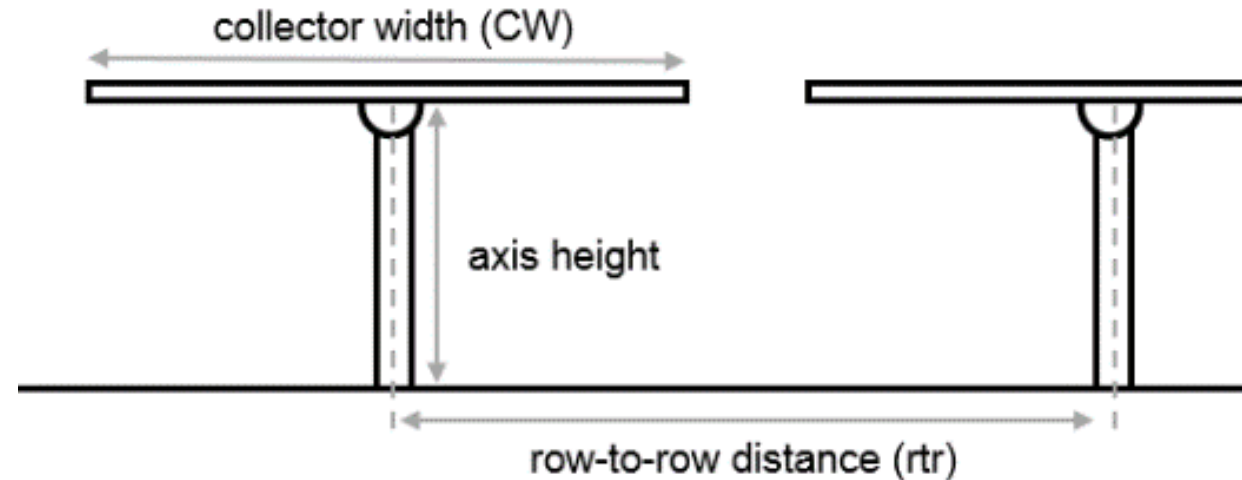

TMY3, Albedo = 0.25 (aged concrete) and  $H = 0.75$

$BG_{\text{model}}$  for 1-axis tracked system can be as high as 20%.  
(Typical global average 9%)

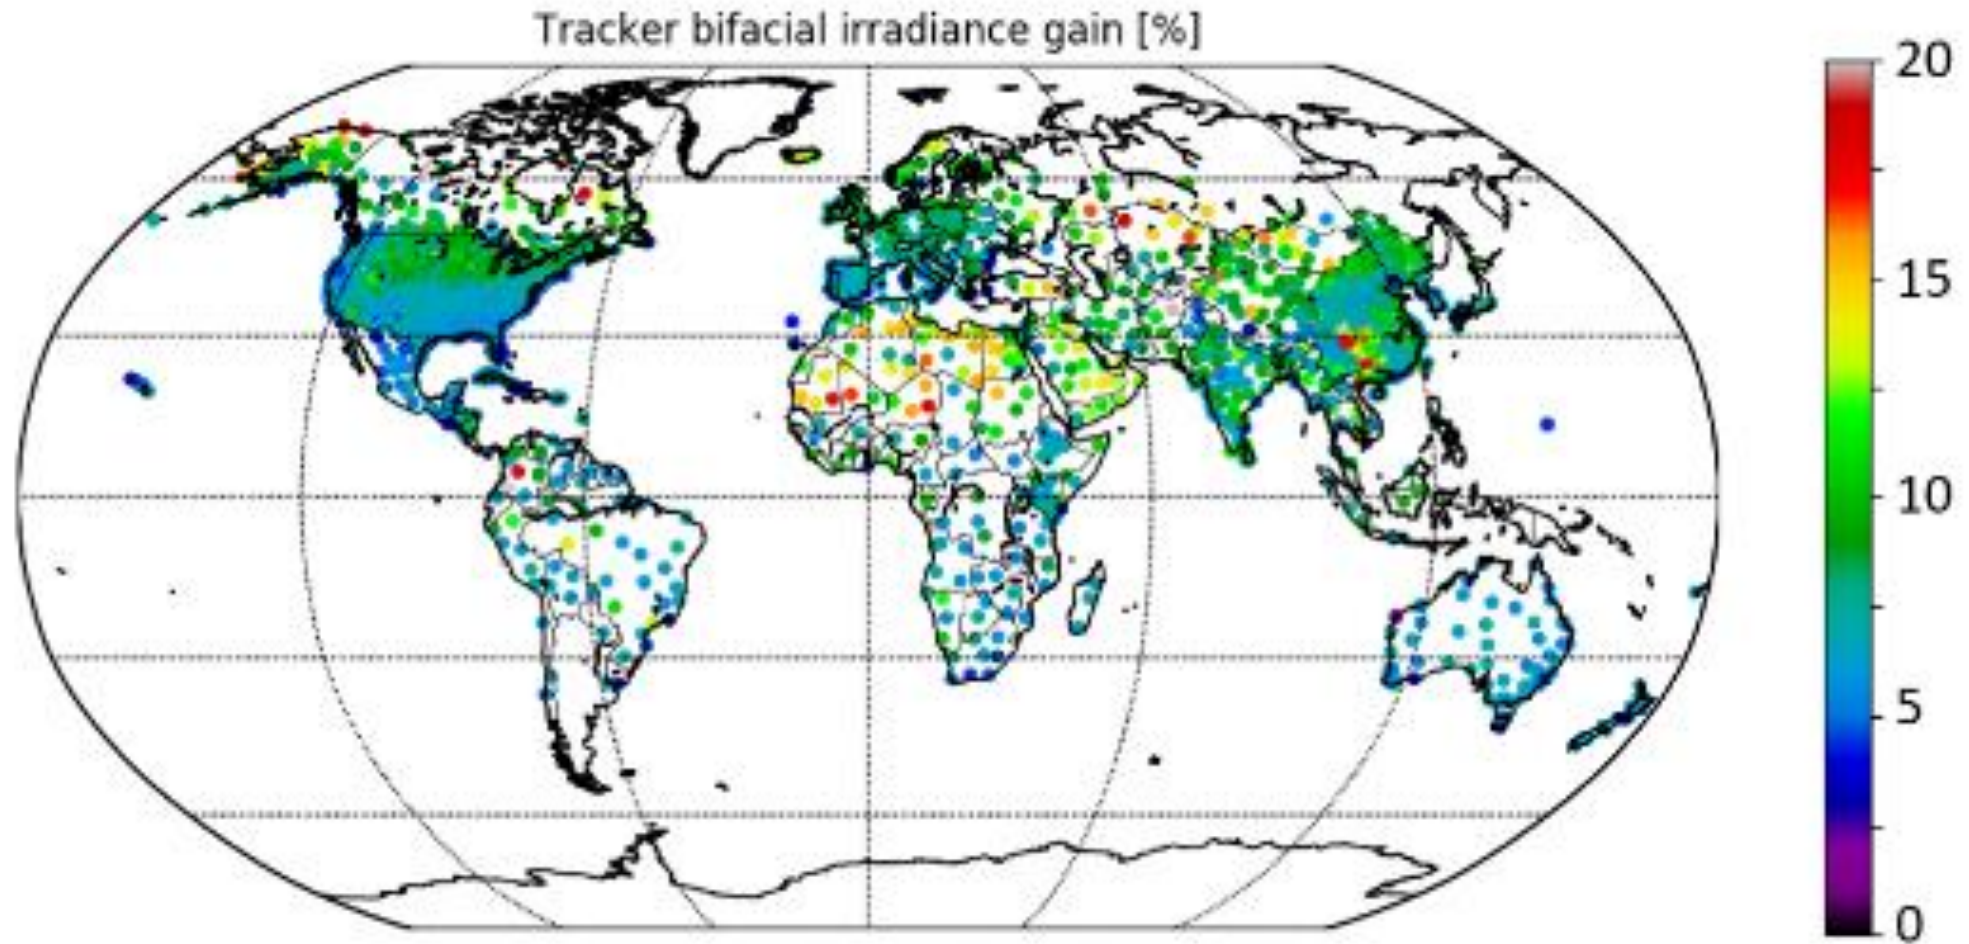

Satellite-based TMY irradiance data, and satellite-measured albedo values from NASA  
 $GCR = 0.35$ ,  $H = 0.75$ ,  $\varphi_{Pmp} = 100\%$ , and  $\eta_{loss} = 0$

# Outline

## Single-Axis Tracking Models

- View Factor
- RADIANCE Ray trace

## Results for:

- **Klamath Falls, Oregon**

## Closer look at:

- Adaptive Tracking Angle
- Edge brightening
- Torque tube shading





# Klamath Falls, OR: Tracker System

100 kW of Silfab HIT,  
2-up landscape

100 kW of Trina mcSi,  
1-up portrait



$H = 0.75$ ,  $GCR = 0.35$ ,  $Albedo = 0.2$  (short grass )

Overall energy gain for a bifacial system is determined by comparing Performance Ratio (PR) [kWh/kW] for both monofacial and bifacial systems



$$BG_{Meas} = 100\% \times \left( \frac{PR_{bifi}}{PR_{mono}} - 1 \right)$$

- Difference in module rating
- Temperature coefficient
- Low light dependence
- Mounting orientation
- Bifaciality


$$BG_{Meas,bifacial} = 100\% \times \left( \frac{PR_{bifi}}{PR_{mono}} \underbrace{\frac{PR_{mono,model}}{PR_{bifi,model}}}_{\text{Correction Factor}} - 1 \right)$$

Correction Factor

Although field IV curve measurements indicate comparable front-side capacity for the two systems, the measured PR was on average 9.4% higher for the bifacial system than for the monofacial system.

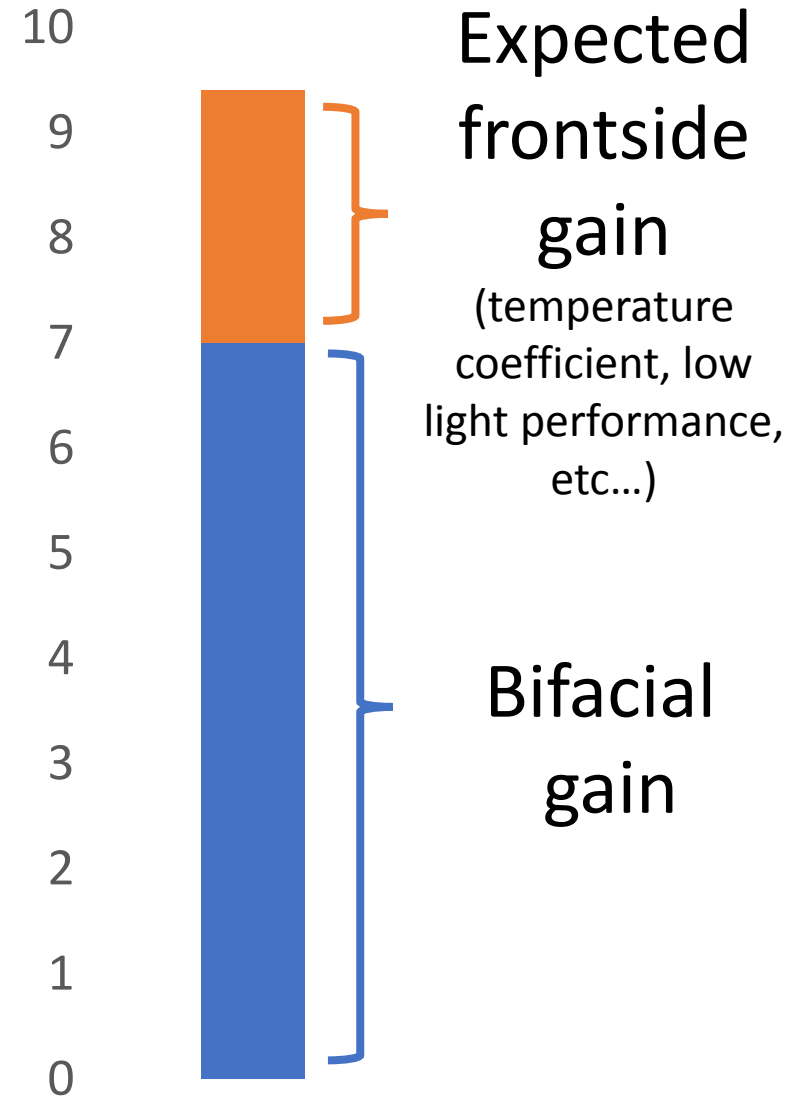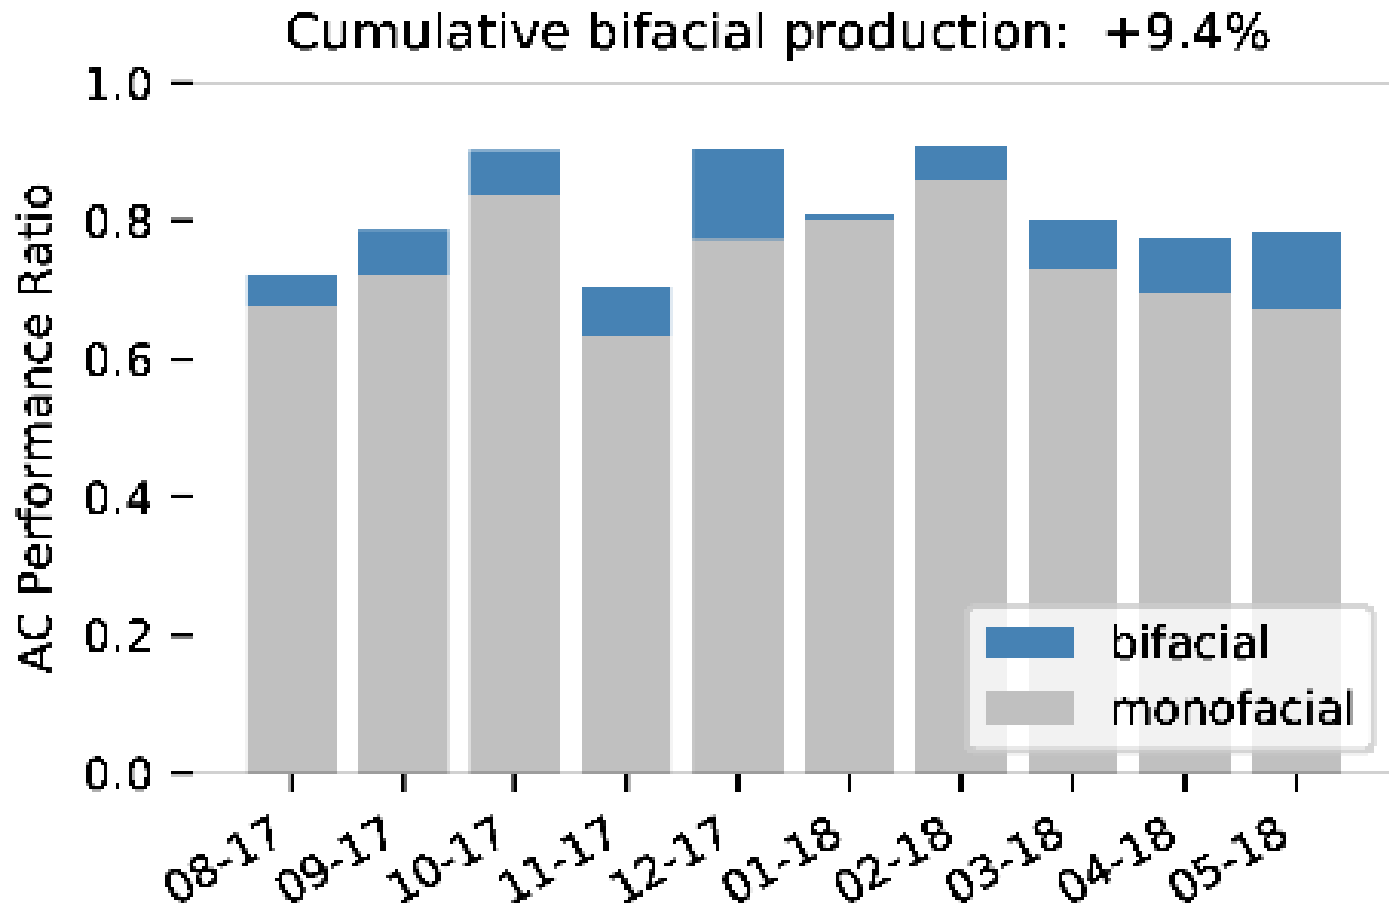

$BG_{Model}$  is 6.7%, close to the measured  $BG_{Meas}$  of 7%

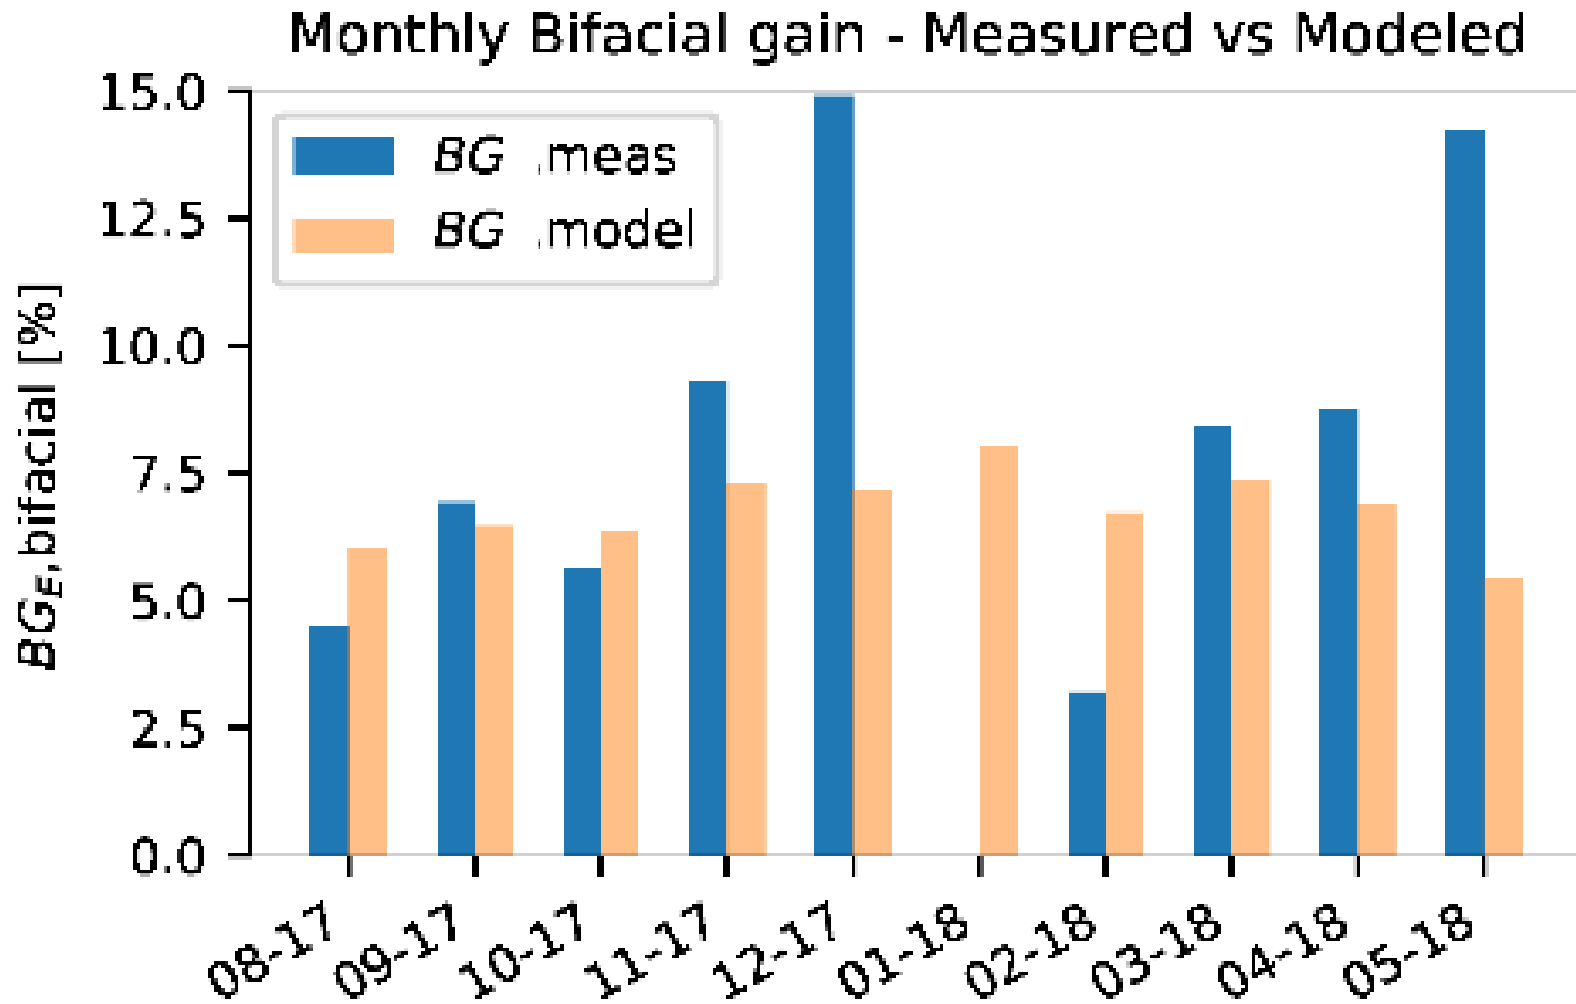

Some variability,  
particularly on  
snowy winter  
months.

# Outline

## Single-Axis Tracking Models

- View Factor
- RADIANCE Ray trace

## Results for:

- Klamath Falls, Oregon


## Closer look at:

- Adaptive Tracking Angle
- Edge brightening
- Torque tube shading


# Adaptive Tracking Algorithm for Bifacials

During cloudy conditions, moving the tracker to horizontal can increase energy yield up to 1% in monofacials.

\*Optimal tilt angle can depend upon sky conditions and is not always horizontal

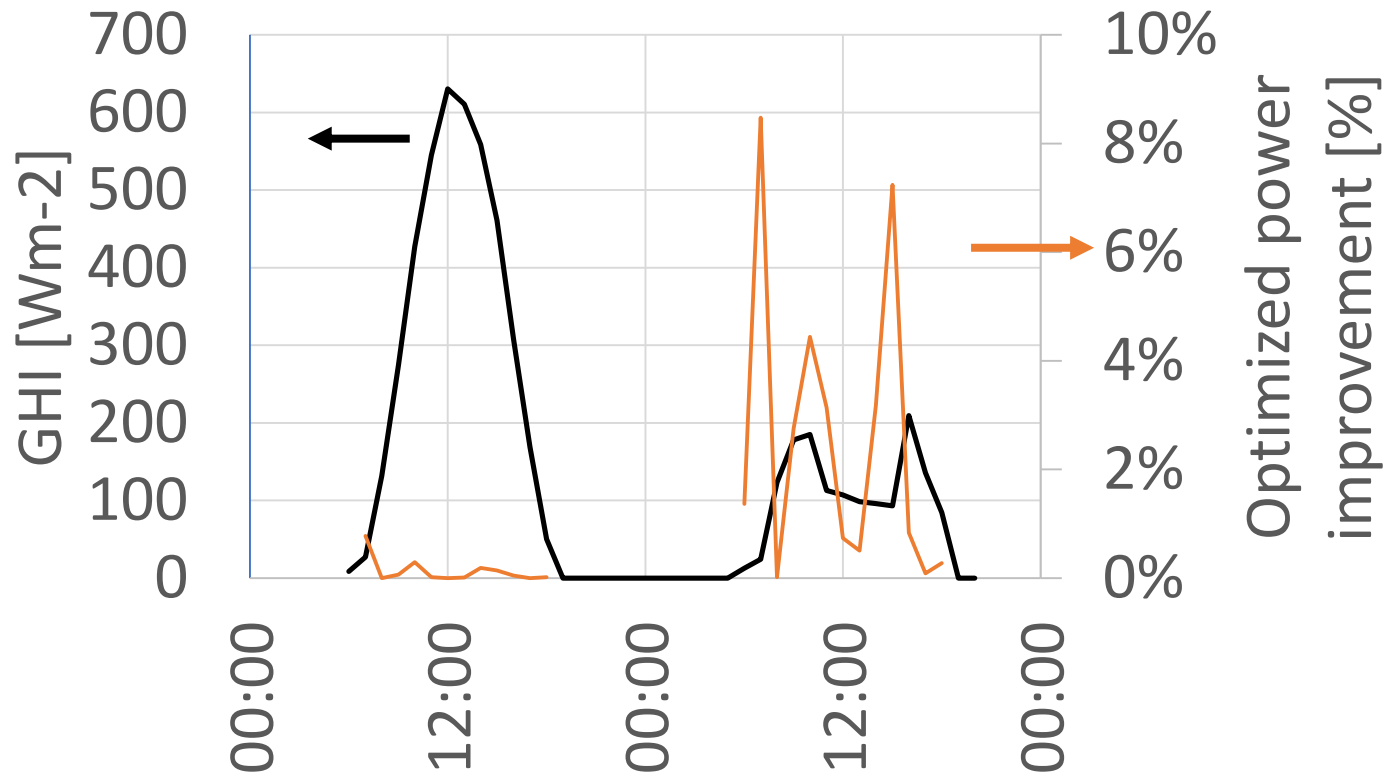

Optimized tracking algorithms improvement is location-dependent for bifacials, and locations at higher-latitudes and greater diffuse irradiance content can show more gain

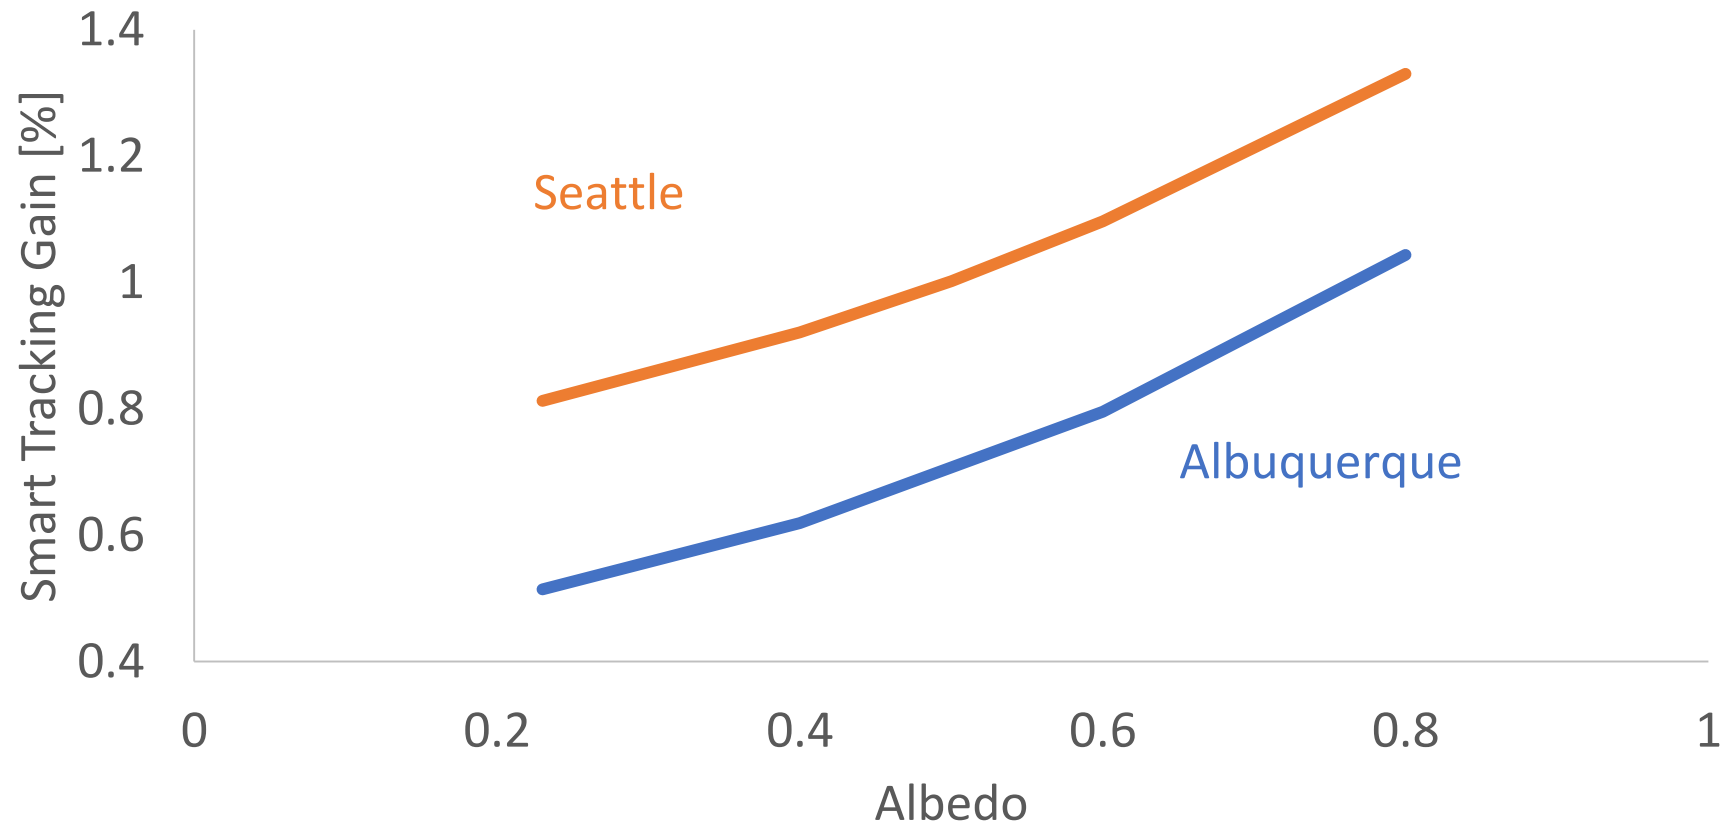

# Outline

## Single-Axis Tracking Models

- View Factor
- RADIANCE Ray trace

## Results for:

- Klamath Falls, Oregon


## Closer look at:

- Adaptive Tracking Angle
- **Edge brightening**
- Torque tube shading




# Edge effects



5 rows with 10 modules brings the  $G_{rear}$  within 5% of a semi-infinite assumption.

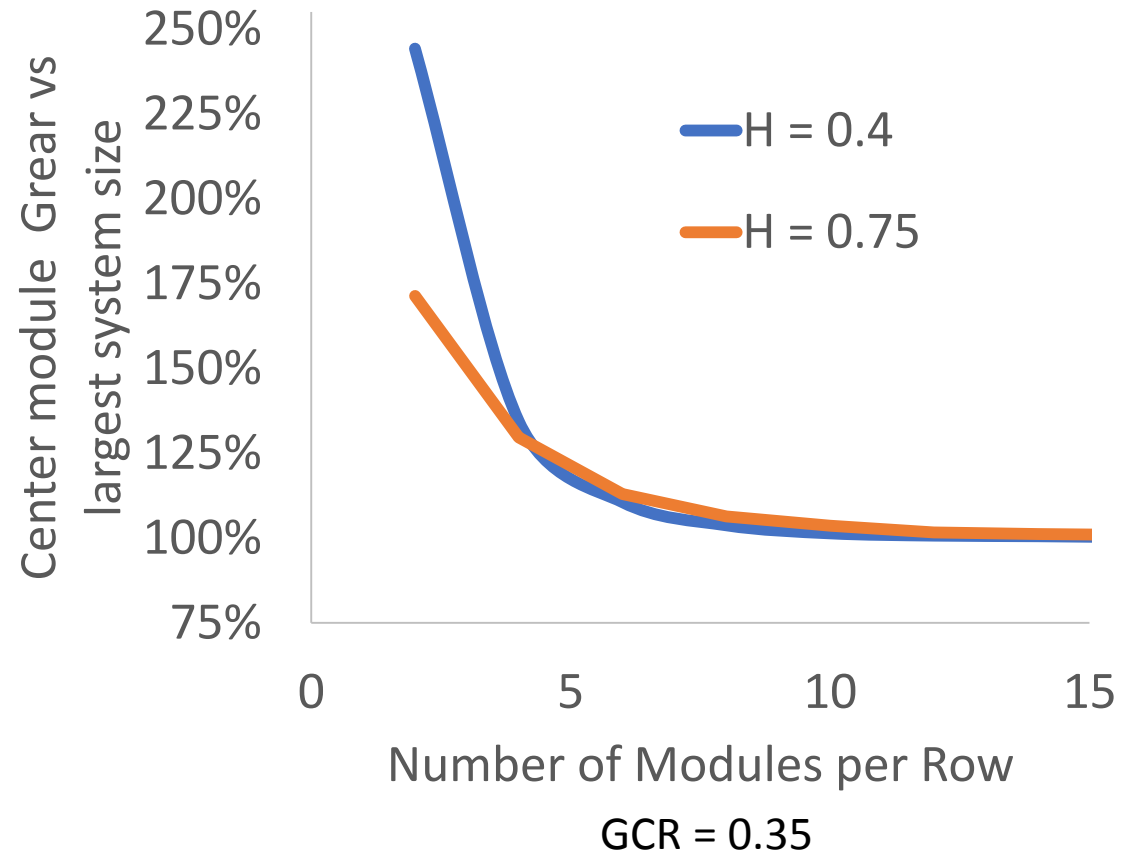


Within a distance of 5 m from the row edge, rear irradiance and  $BG_E$  is increased by 25% on the south edge, and 10% on the north edge.

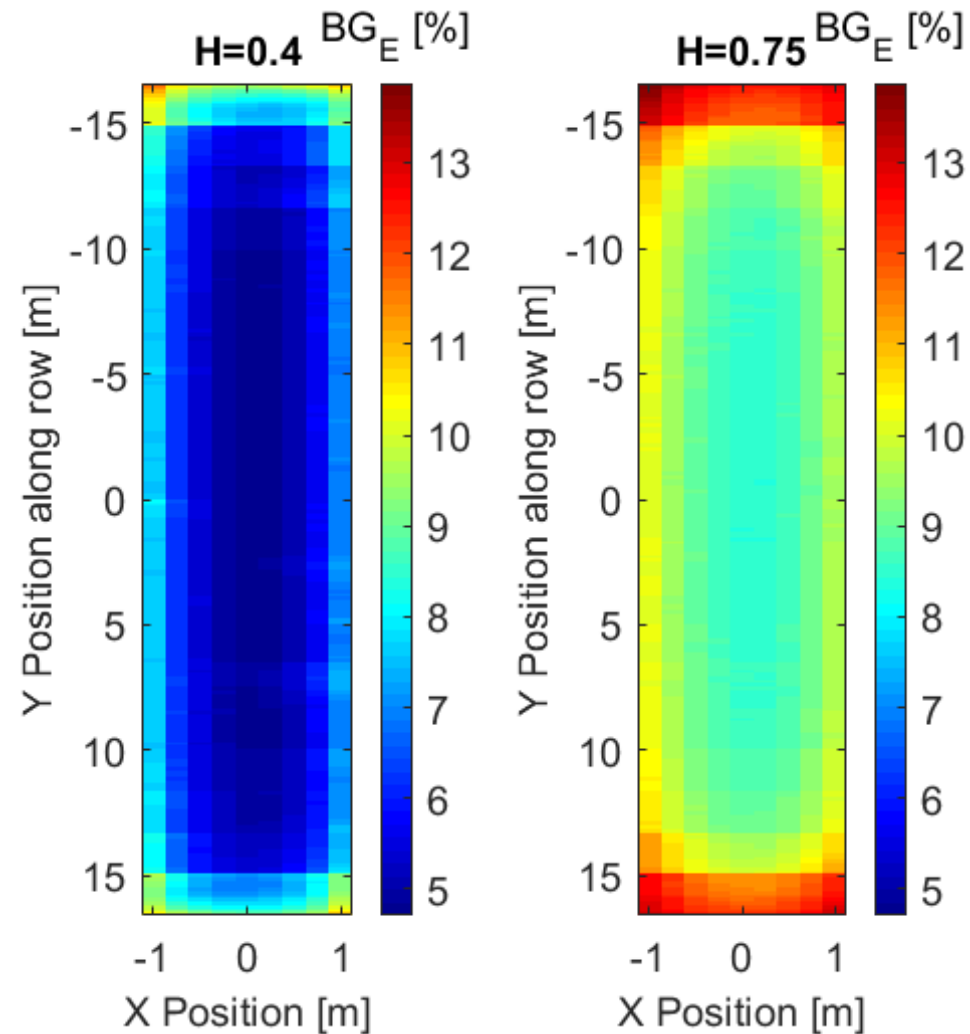

# June 21<sup>st</sup> row shading and $BG_E$ modeling by hour (nearest 5 degree tracking)

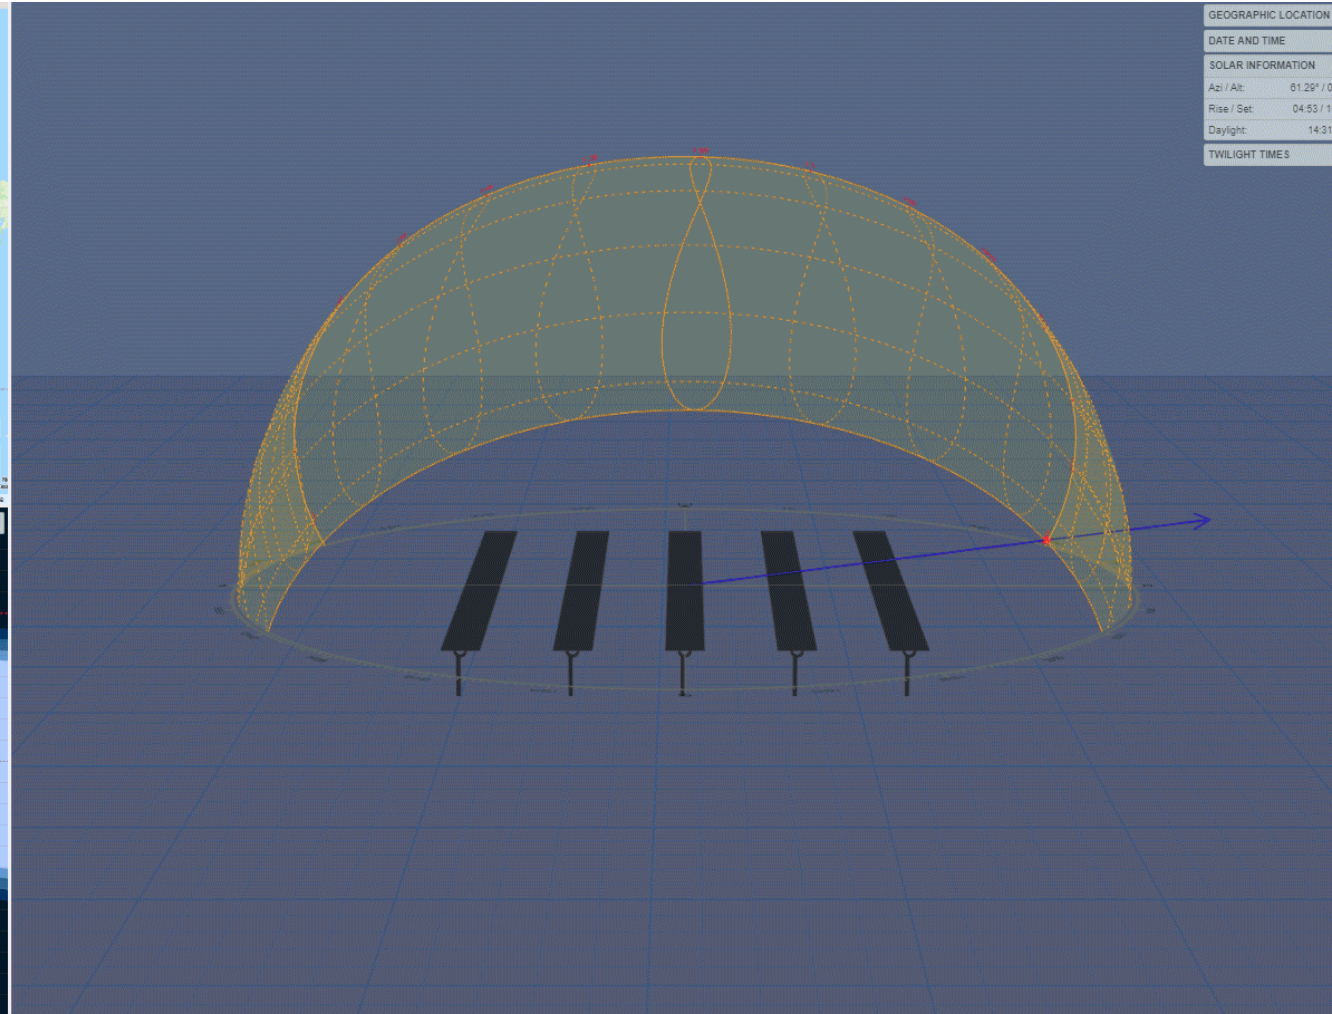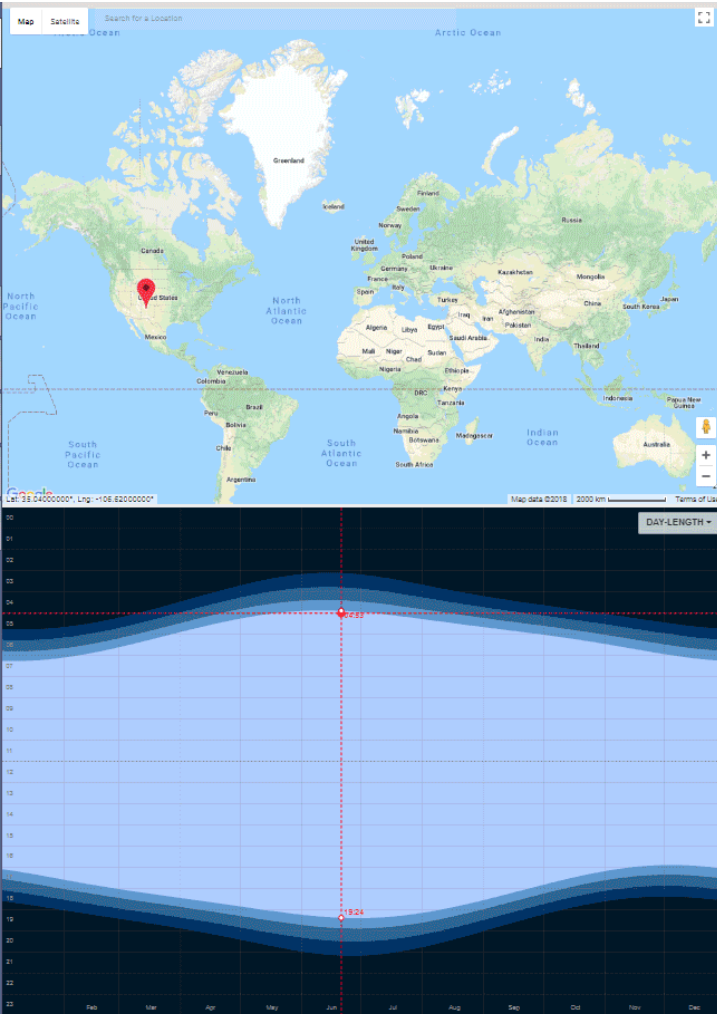

GEOGRAPHIC LOCATION	>
DATE AND TIME	>
SOLAR INFORMATION	>
Azi / Alt:	01.29° / 0.86°
Rise / Set:	04:53 / 19:24
Daylight:	14:31 Hrs
TWILIGHT TIMES	>

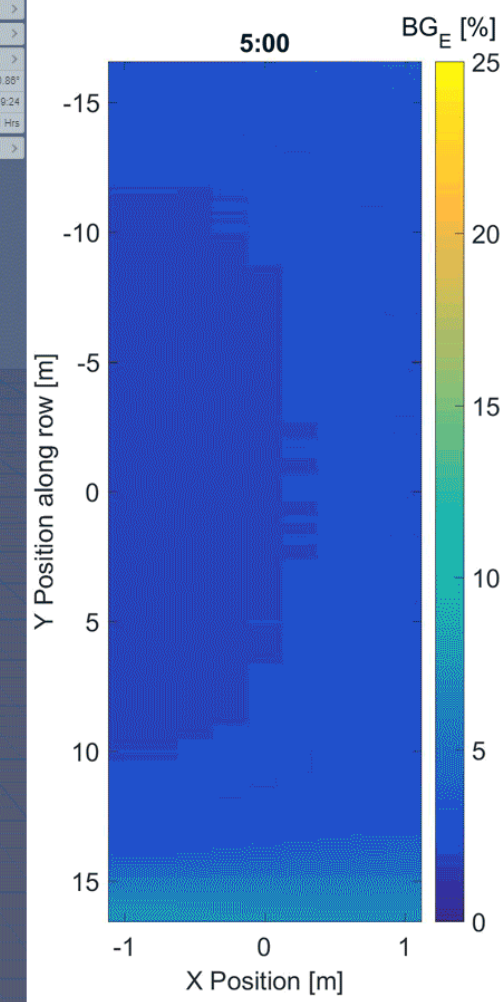

# Outline

## Single-Axis Tracking Models

- View Factor
- RADIANCE Ray trace



## Results for:

- Klamath Falls, Oregon

## Closer look at:

- Adaptive Tracking Angle
- Edge brightening
- Torque tube shading

# Tube Shading Loss

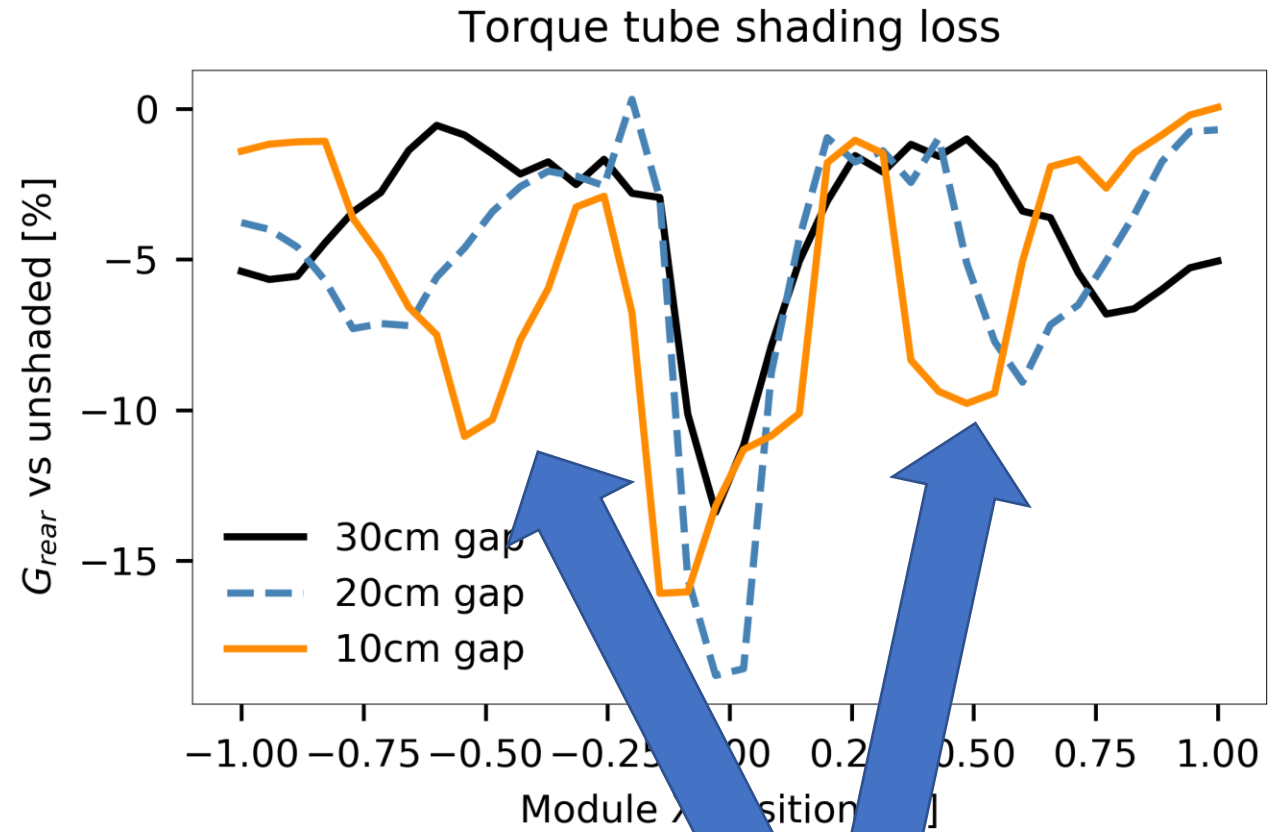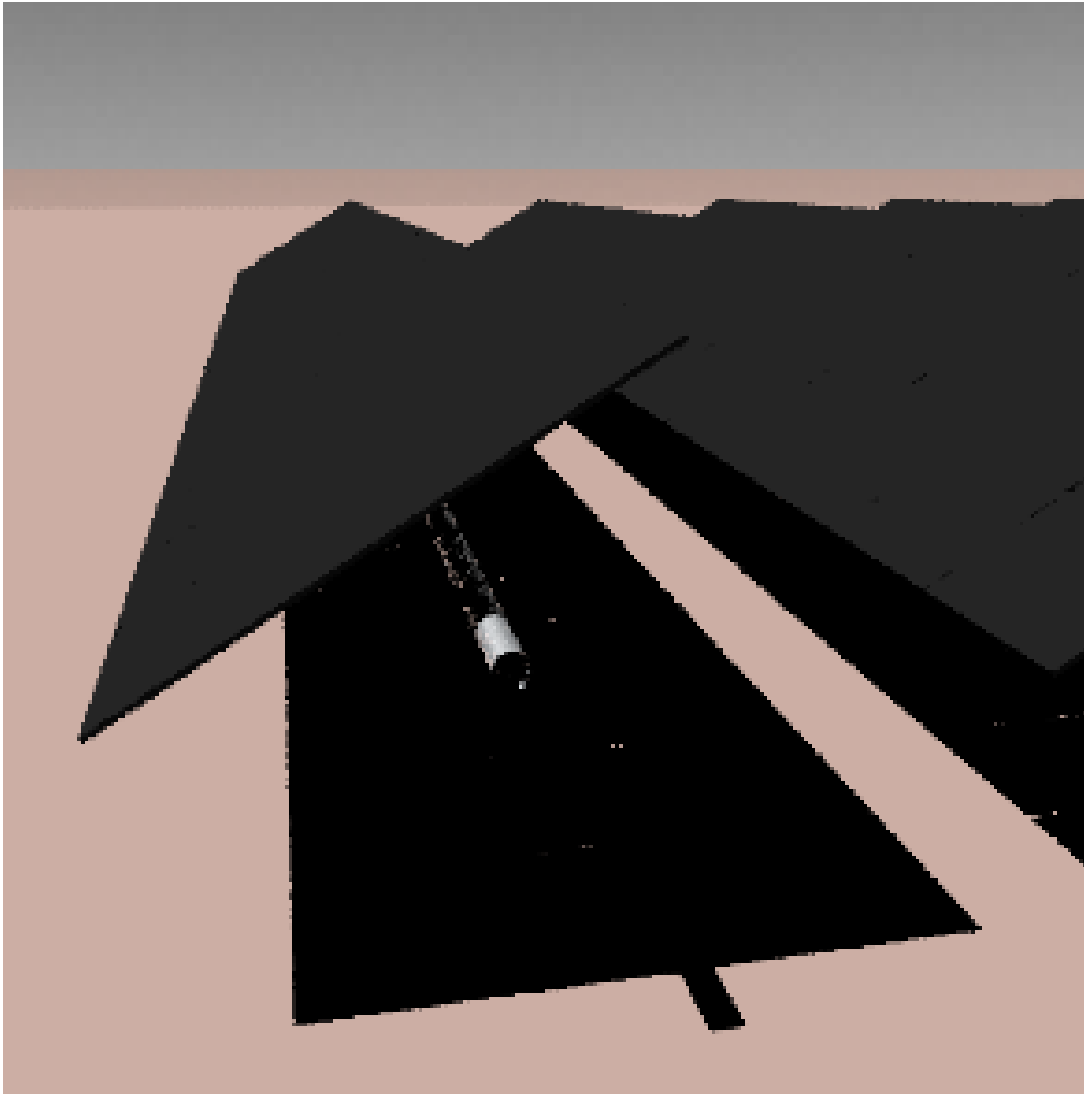

As expected, there is a primary peak in shading loss directly behind the tube at  $X = 0$  m, reducing  $G_{rear}$  by 15% - 20%.

$$x_{shadow} = 0.5 rtr \left[ \left( 1 - \frac{g+r}{H \cdot CW} \right)^{-1} - 1 \right]$$

# Summary Slide

1. Rear irradiance and available bifacial gain is dependent on **available irradiance and location**.
2. **Isolating the bifacial response** requires normalization of BG by modeled front-side performance  $PR_{\text{model}}$  for both module types.
3. Under cloudy conditions, bifacial gain can be improved by **not tracking directly at the sun**. The advantage increases with high albedo and for more diffuse climates.
4. The smaller the system, the less there will be mutual shading. So if you are running these models and comparing against field data, a large array system is needed **to match the infinite assumptions**.
5. Rack shading produces 15%-20% shading losses on rear irradiance that need to be considered and further studied.



# Thank you

(Sli.do for Questions)

## Acknowledgements:

This work was supported by the U.S. Department of Energy under Contract No. DE-AC36-08-GO28308 with the National Renewable Energy Laboratory (NREL). Funding provided by the U.S. Department of Energy's Office of Energy Efficiency and Renewable Energy (EERE) under Solar Energy Technologies Office (SETO) Agreement Number 30286.

[silvanaa@email.arizona.edu](mailto:silvanaa@email.arizona.edu)

