




Bifacial PV system mismatch loss estimation

Silvana Ayala Peláez, Chris Deline
Sara MacAlpine, Juwi Solar Americas

National Renewable Energy Laboratory
Carlos Olalla, Rovira I Virgili University, Tarragona




Nonuniform rear-irradiance on bifacial PV systems can cause additional mismatch loss, which may not be appropriately captured in PV energy production estimates and software.

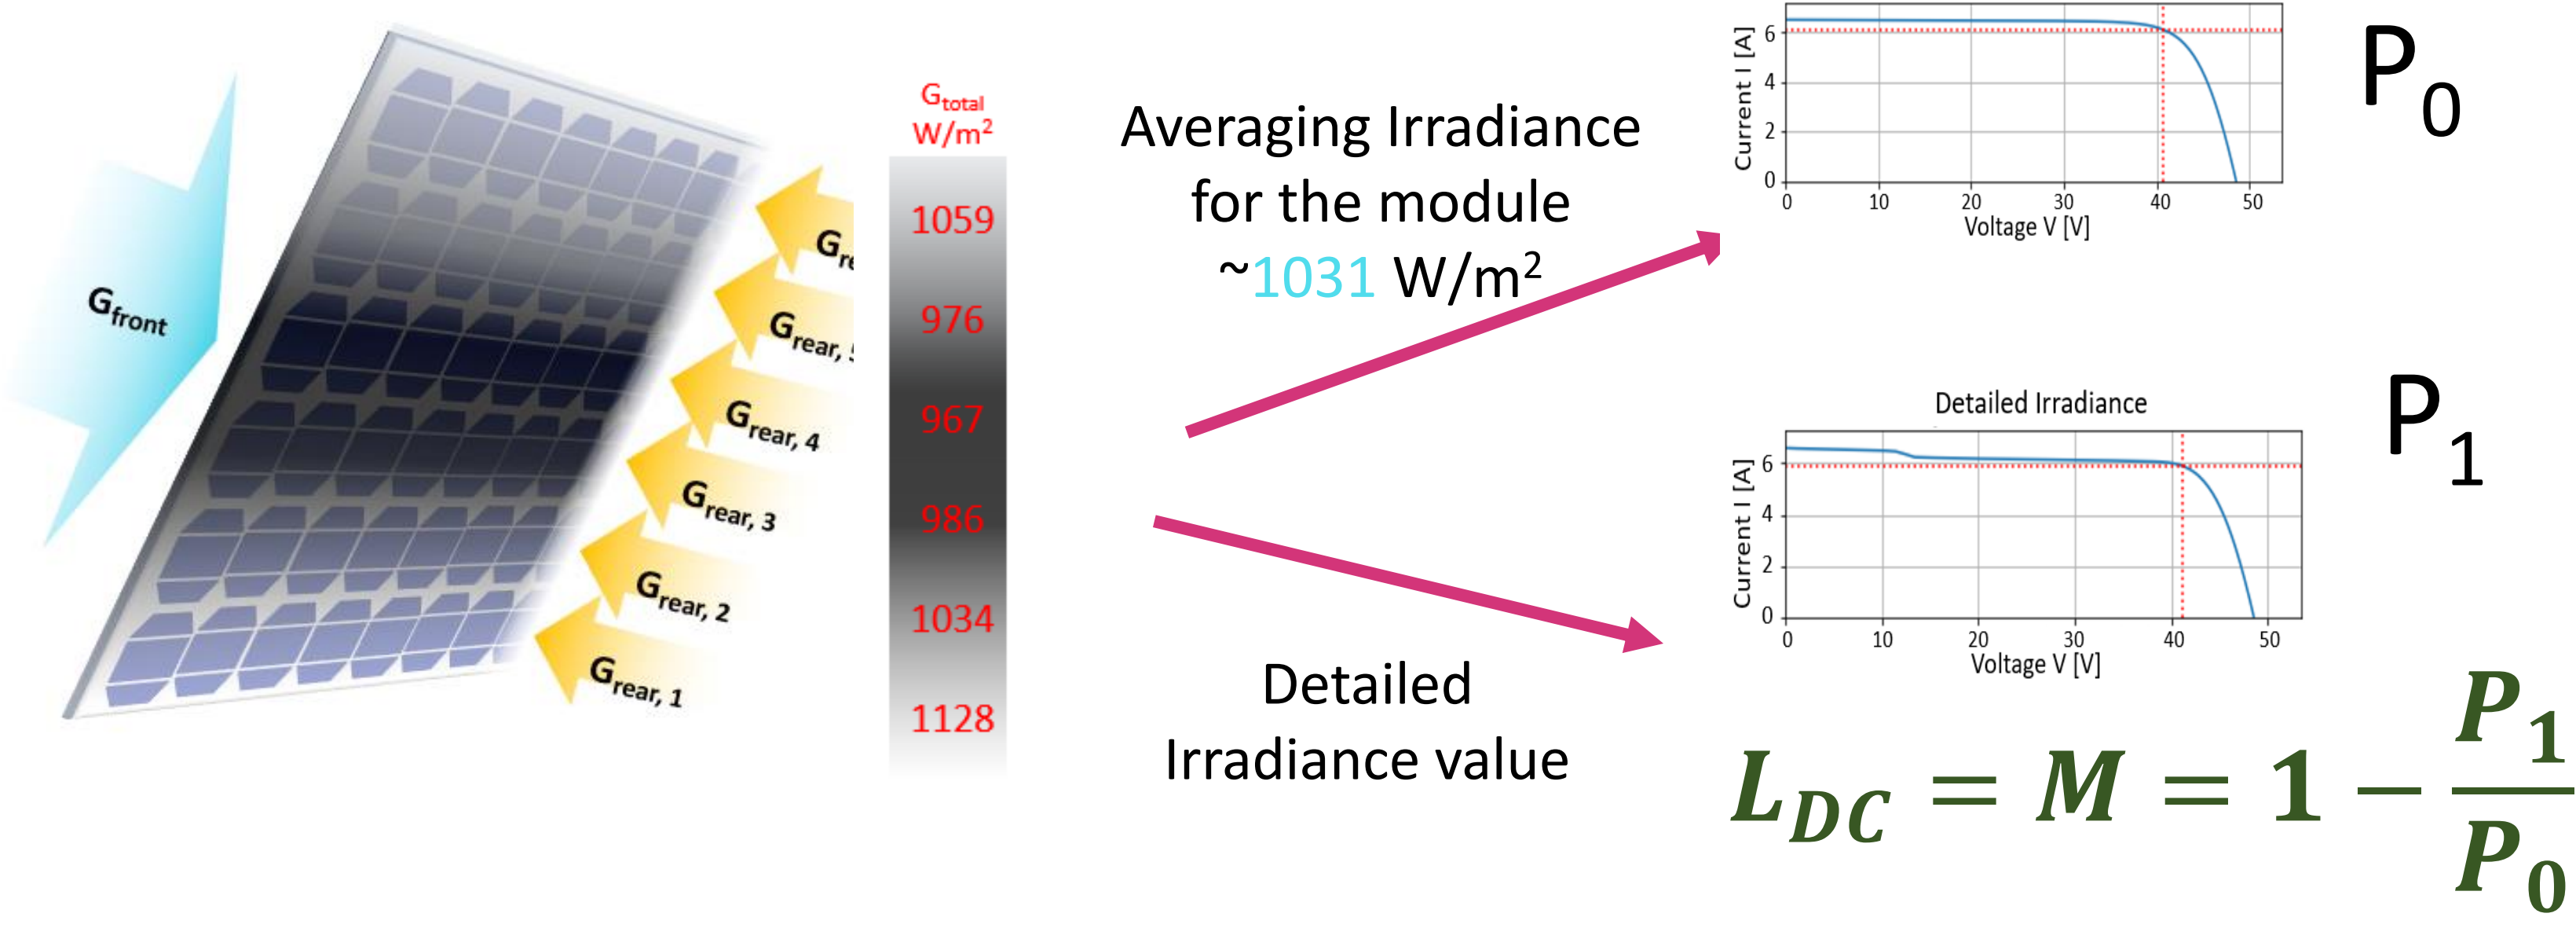


Simulations: Fixed Tilt + Tracking + Tracking w TT

System	Height	Albedo	GCR	Tilt	# modules
Rooftop	0.15 – 1 m	0.62	0.67	10°	1-landscape
Tracking	1.0 – 2.4 m	0.2	0.33	--	1-portrait

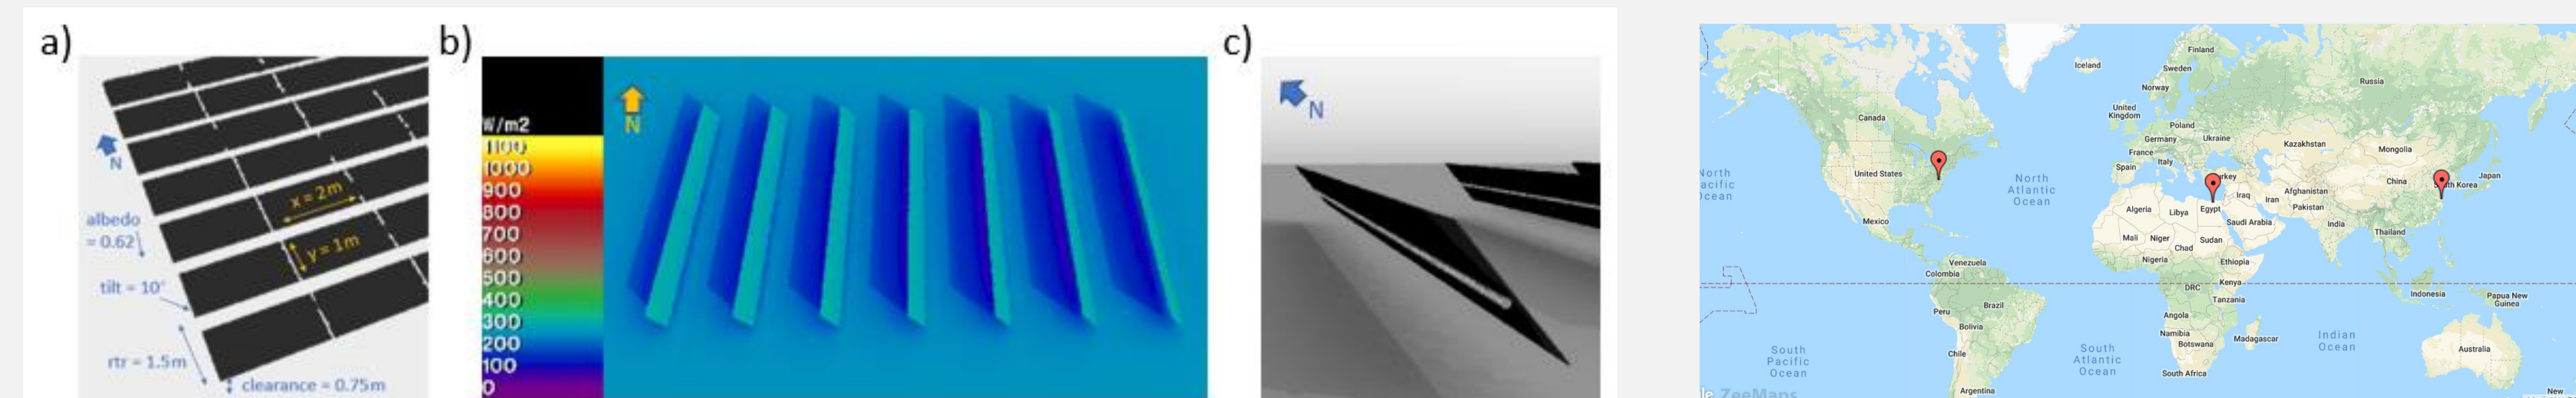

Annual mismatch loss %


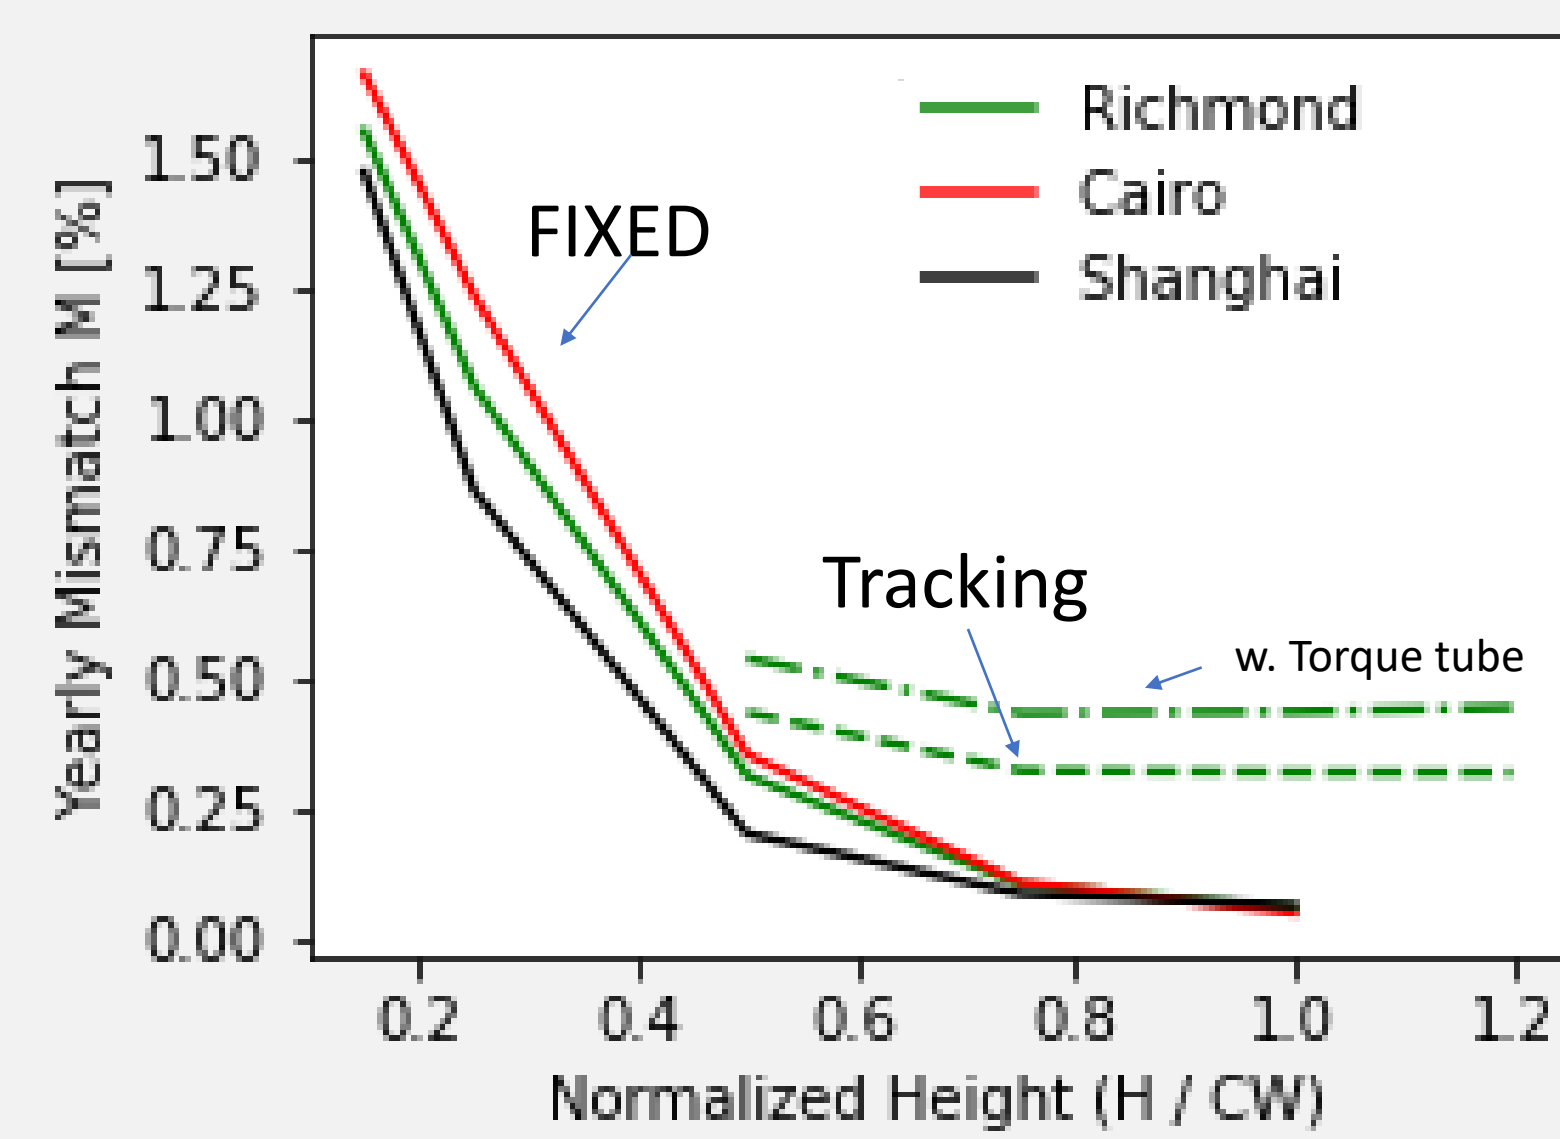


Slight climate dependence is visible for the high-albedo rooftop simulations. For HSAT simulations, the effect of climate was similarly modest but reversed from what is shown in the high-albedo rooftop simulations, possibly due to the greater influence of diffuse irradiance in a low-albedo tracking scenario.

Fill Factor and Bifaciality Factor dependency

Modules exhibiting lower FF are susceptible to reduced mismatch loss. This is expected due to the smaller slope $-dP/dI$ in low-FF modules.

Sample mismatch curves calculated for fixed values of FF and ϕ_{Bifi} can be applied more generally due to a linear dependence.

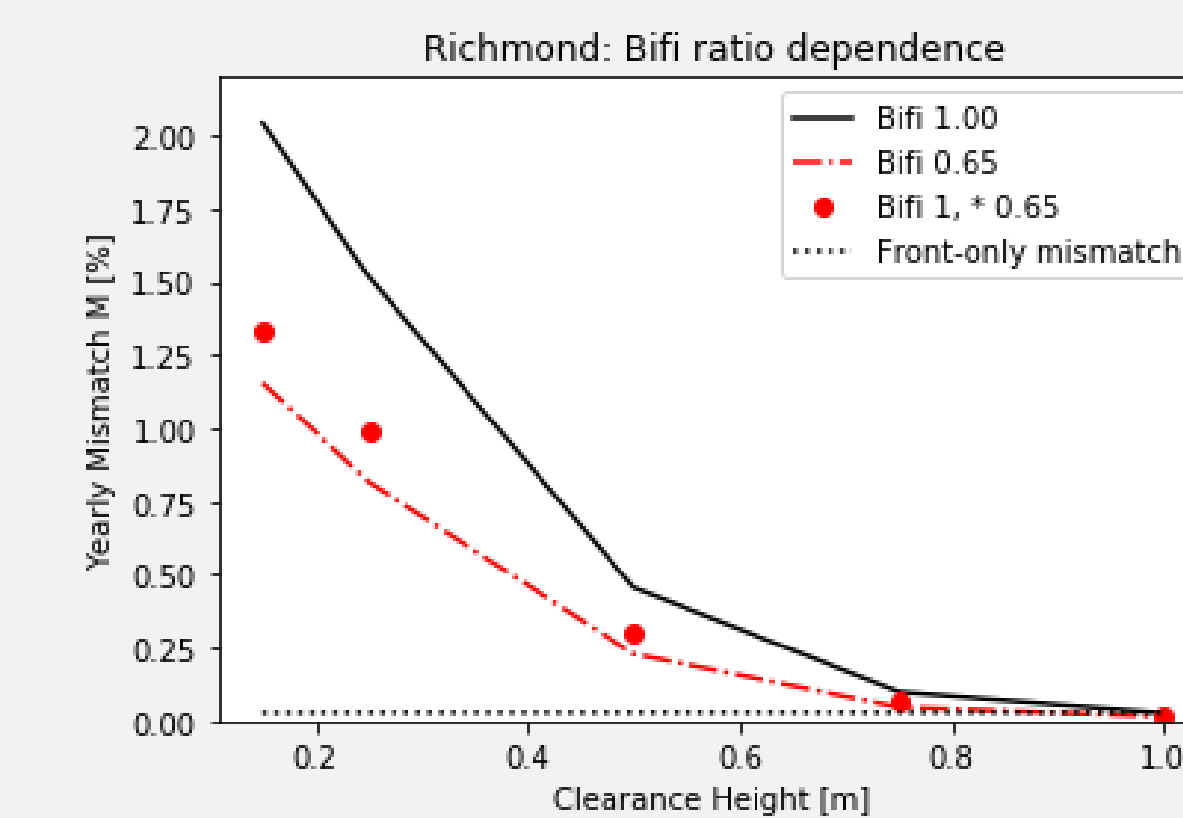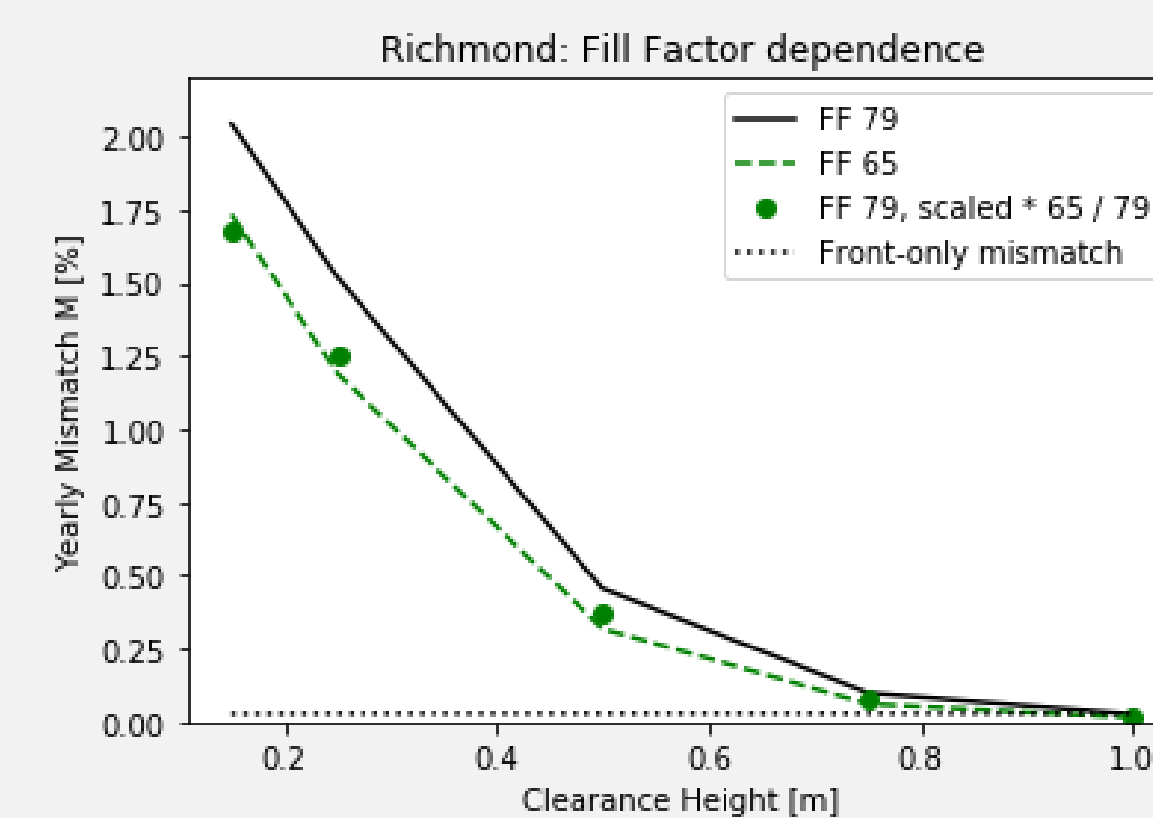


$$M[\%]_{FF1} = M[\%]_{FF0} \frac{FF_1}{FF_0}$$

$$M[\%]_{\phi_{Bifi,1}} = M[\%]_{\phi_{Bifi,0}} \frac{\phi_{Bifi,1}}{\phi_{Bifi,0}}$$

Reduced Order Model

A simplified empirical relationship was found that links the spatial variation of irradiance (to the resulting mismatch loss factor

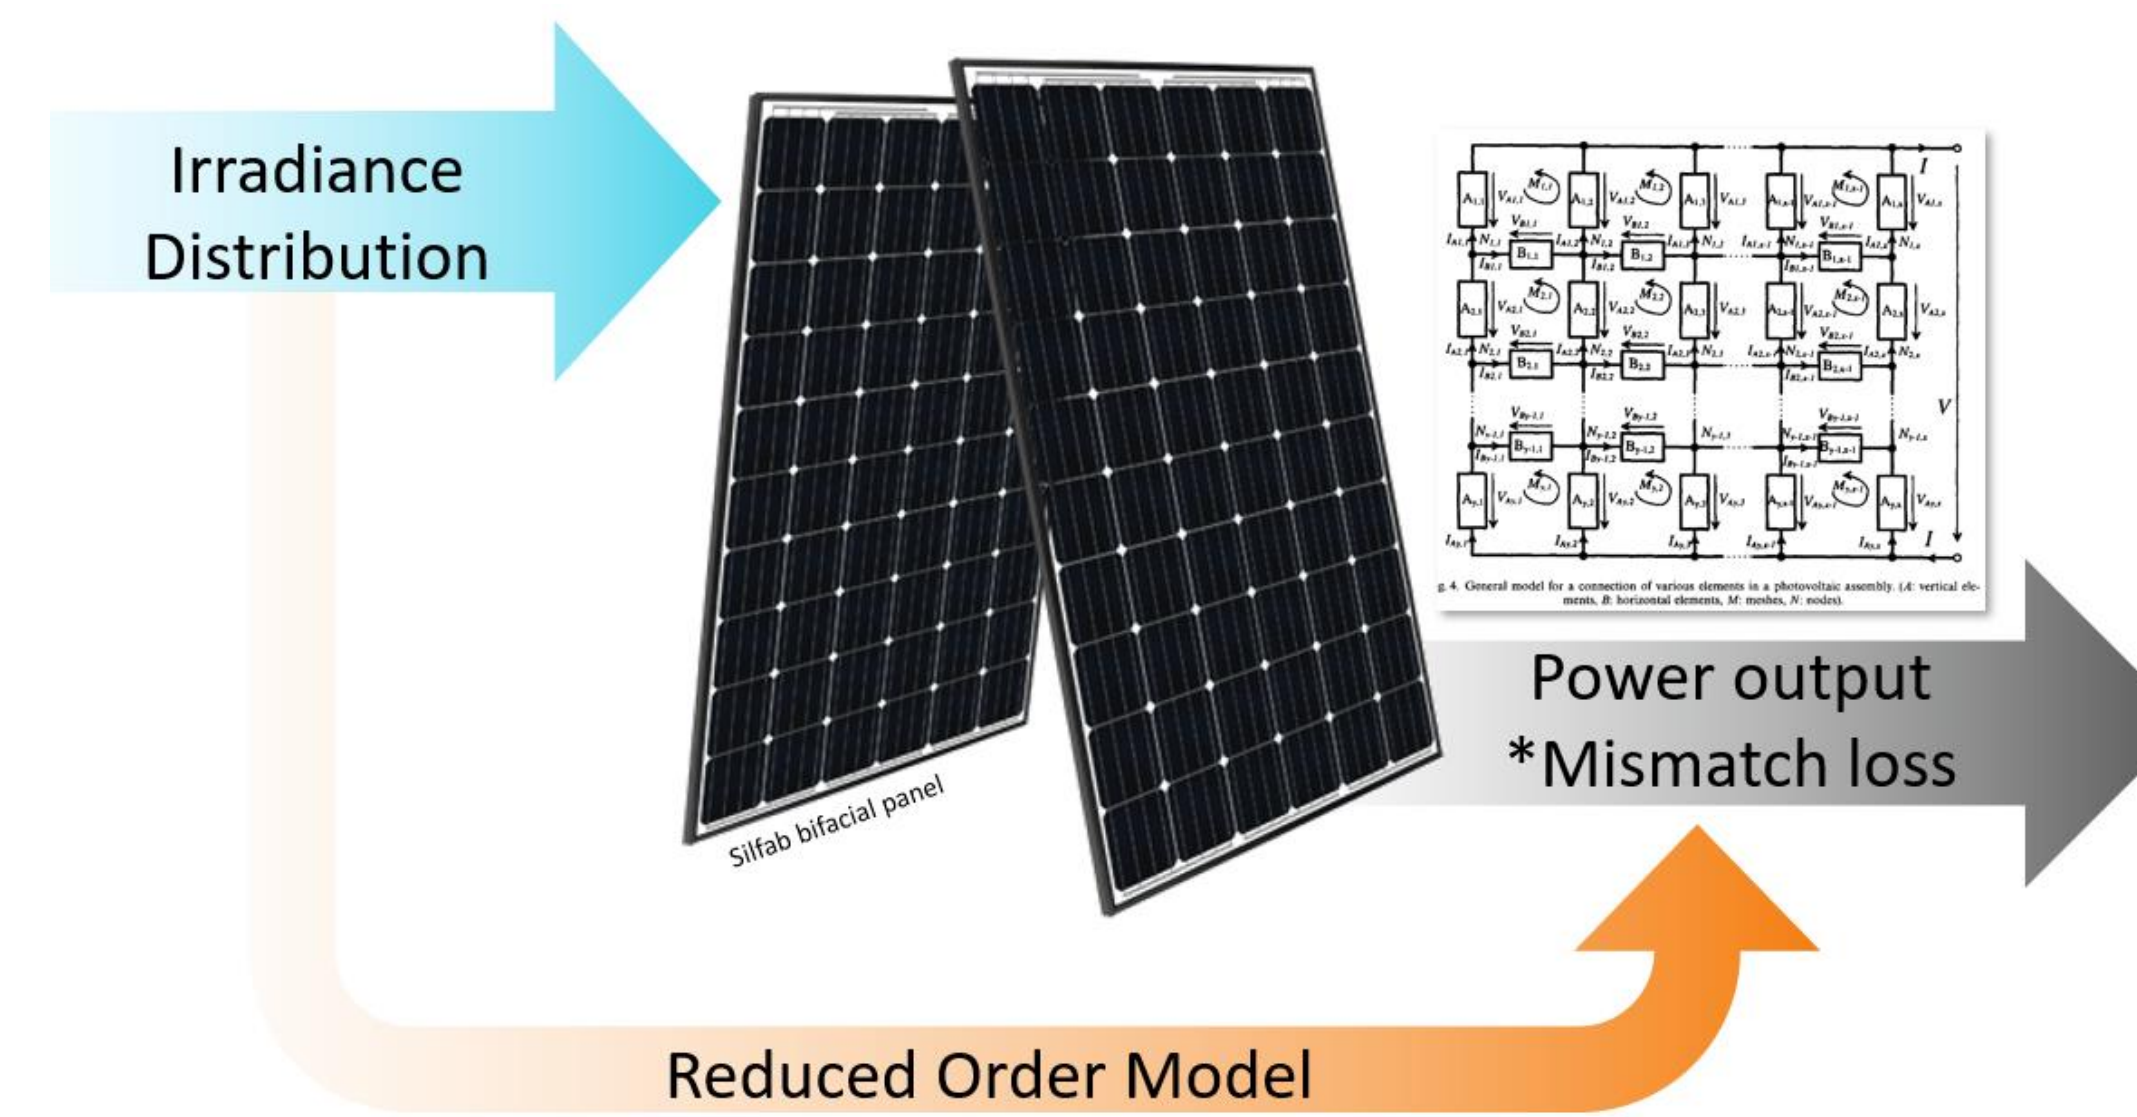


Stdev

$$\sigma[\%] = \frac{1}{\bar{G}_{total}} \sqrt{\frac{\sum (G_{total,i} - \bar{G}_{total})^2}{n-1}} \times 100\%$$

MAD Mean absolute difference

$$\Delta[\%] = \frac{1}{n^2 \bar{G}_{total}} \sum_{i=1}^n \sum_{j=1}^n |G_{total,i} - G_{total,j}| \times 100\%$$

Irradiance distribution vs. Power Mismatch, Fixed

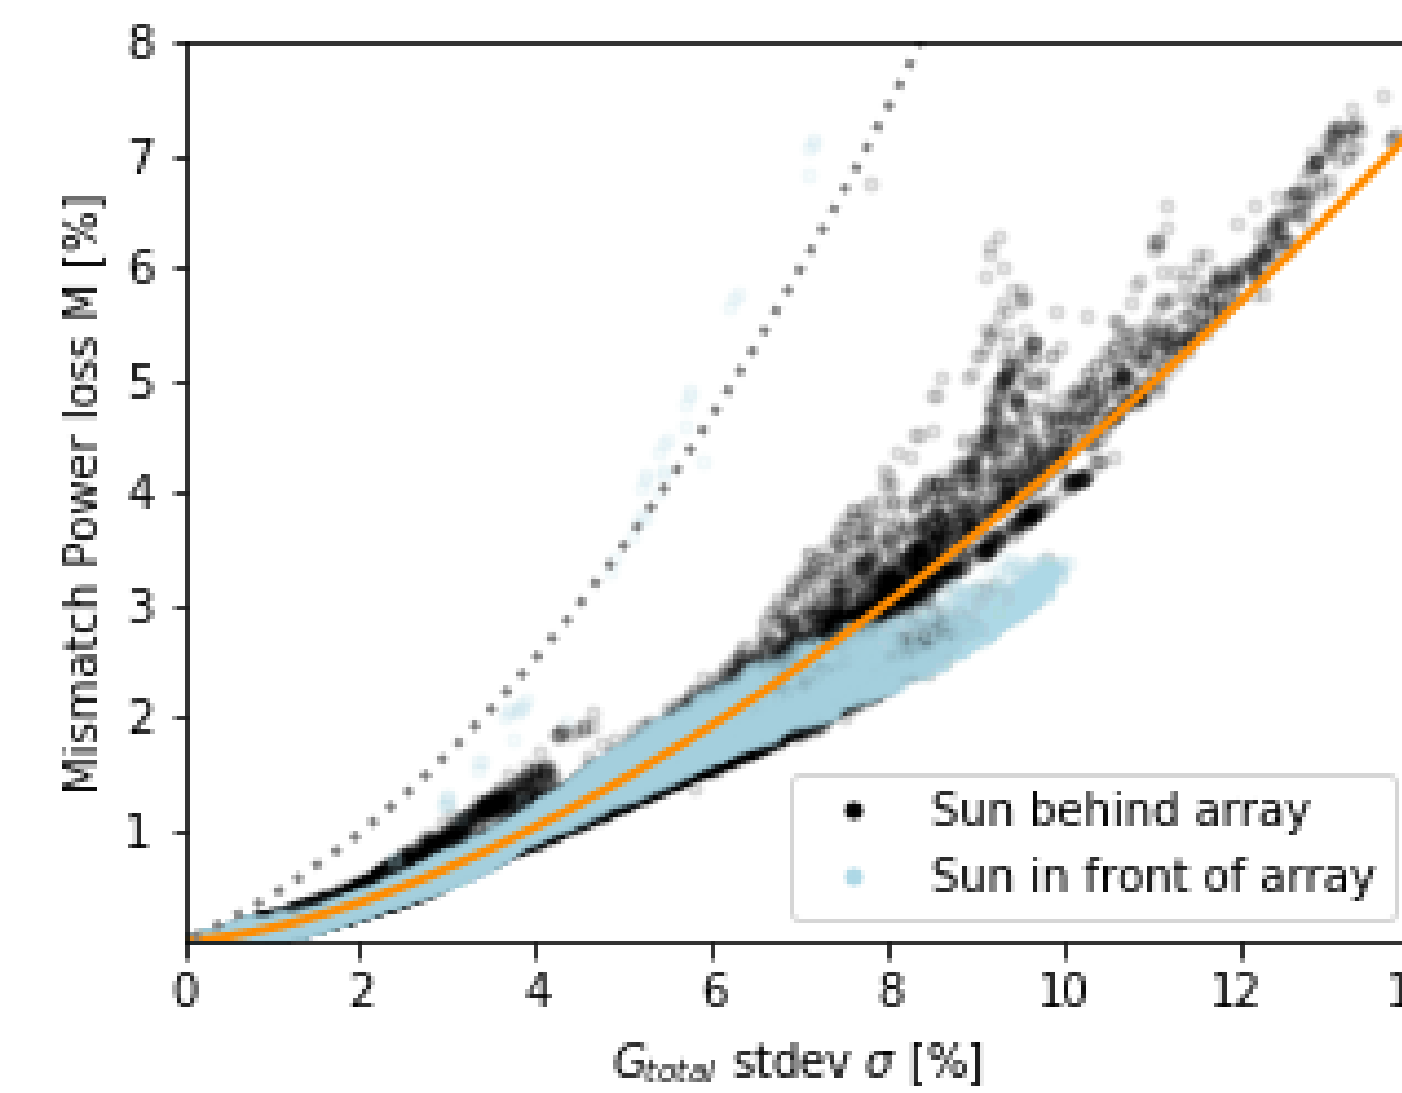

Hourly simulation showing power mismatch M [%] as a function of G_{total} spatial standard deviation. Two overlaying fits and a comparison fit from Janssen et al shown.


$$M[\%]_{Fit1} = e^{1.57 \cdot \ln(\sigma[\%]) - 2.2}$$

$$M[\%]_{Fit2} = 0.15 \sigma[\%] + 0.027 \sigma[\%]^2$$

$$M[\%]_{Janssen} = 0.33 \sigma[\%] + 0.0745 \sigma[\%]^2$$

Irradiance distribution vs. Power Mismatch, Tracking


For the two tracking scenarios, results do not fall directly in line with the curves established for fixed-tilt simulations.

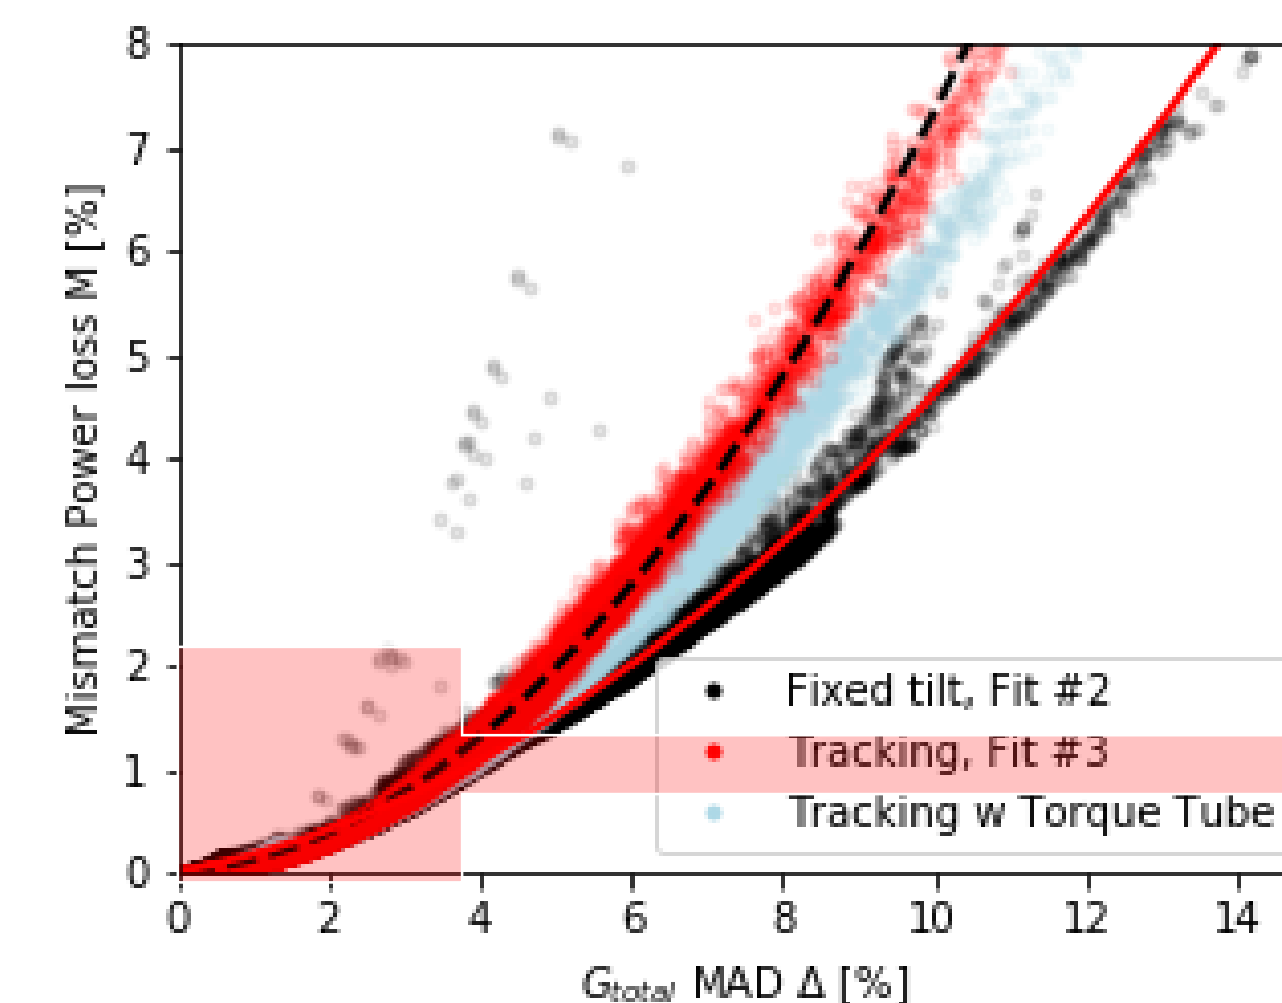

Similar curve form, but different empirical-fit parameters.



Agreement is much better at $\Delta < 4$, where bulk of the energy is at.

Experimental Validation

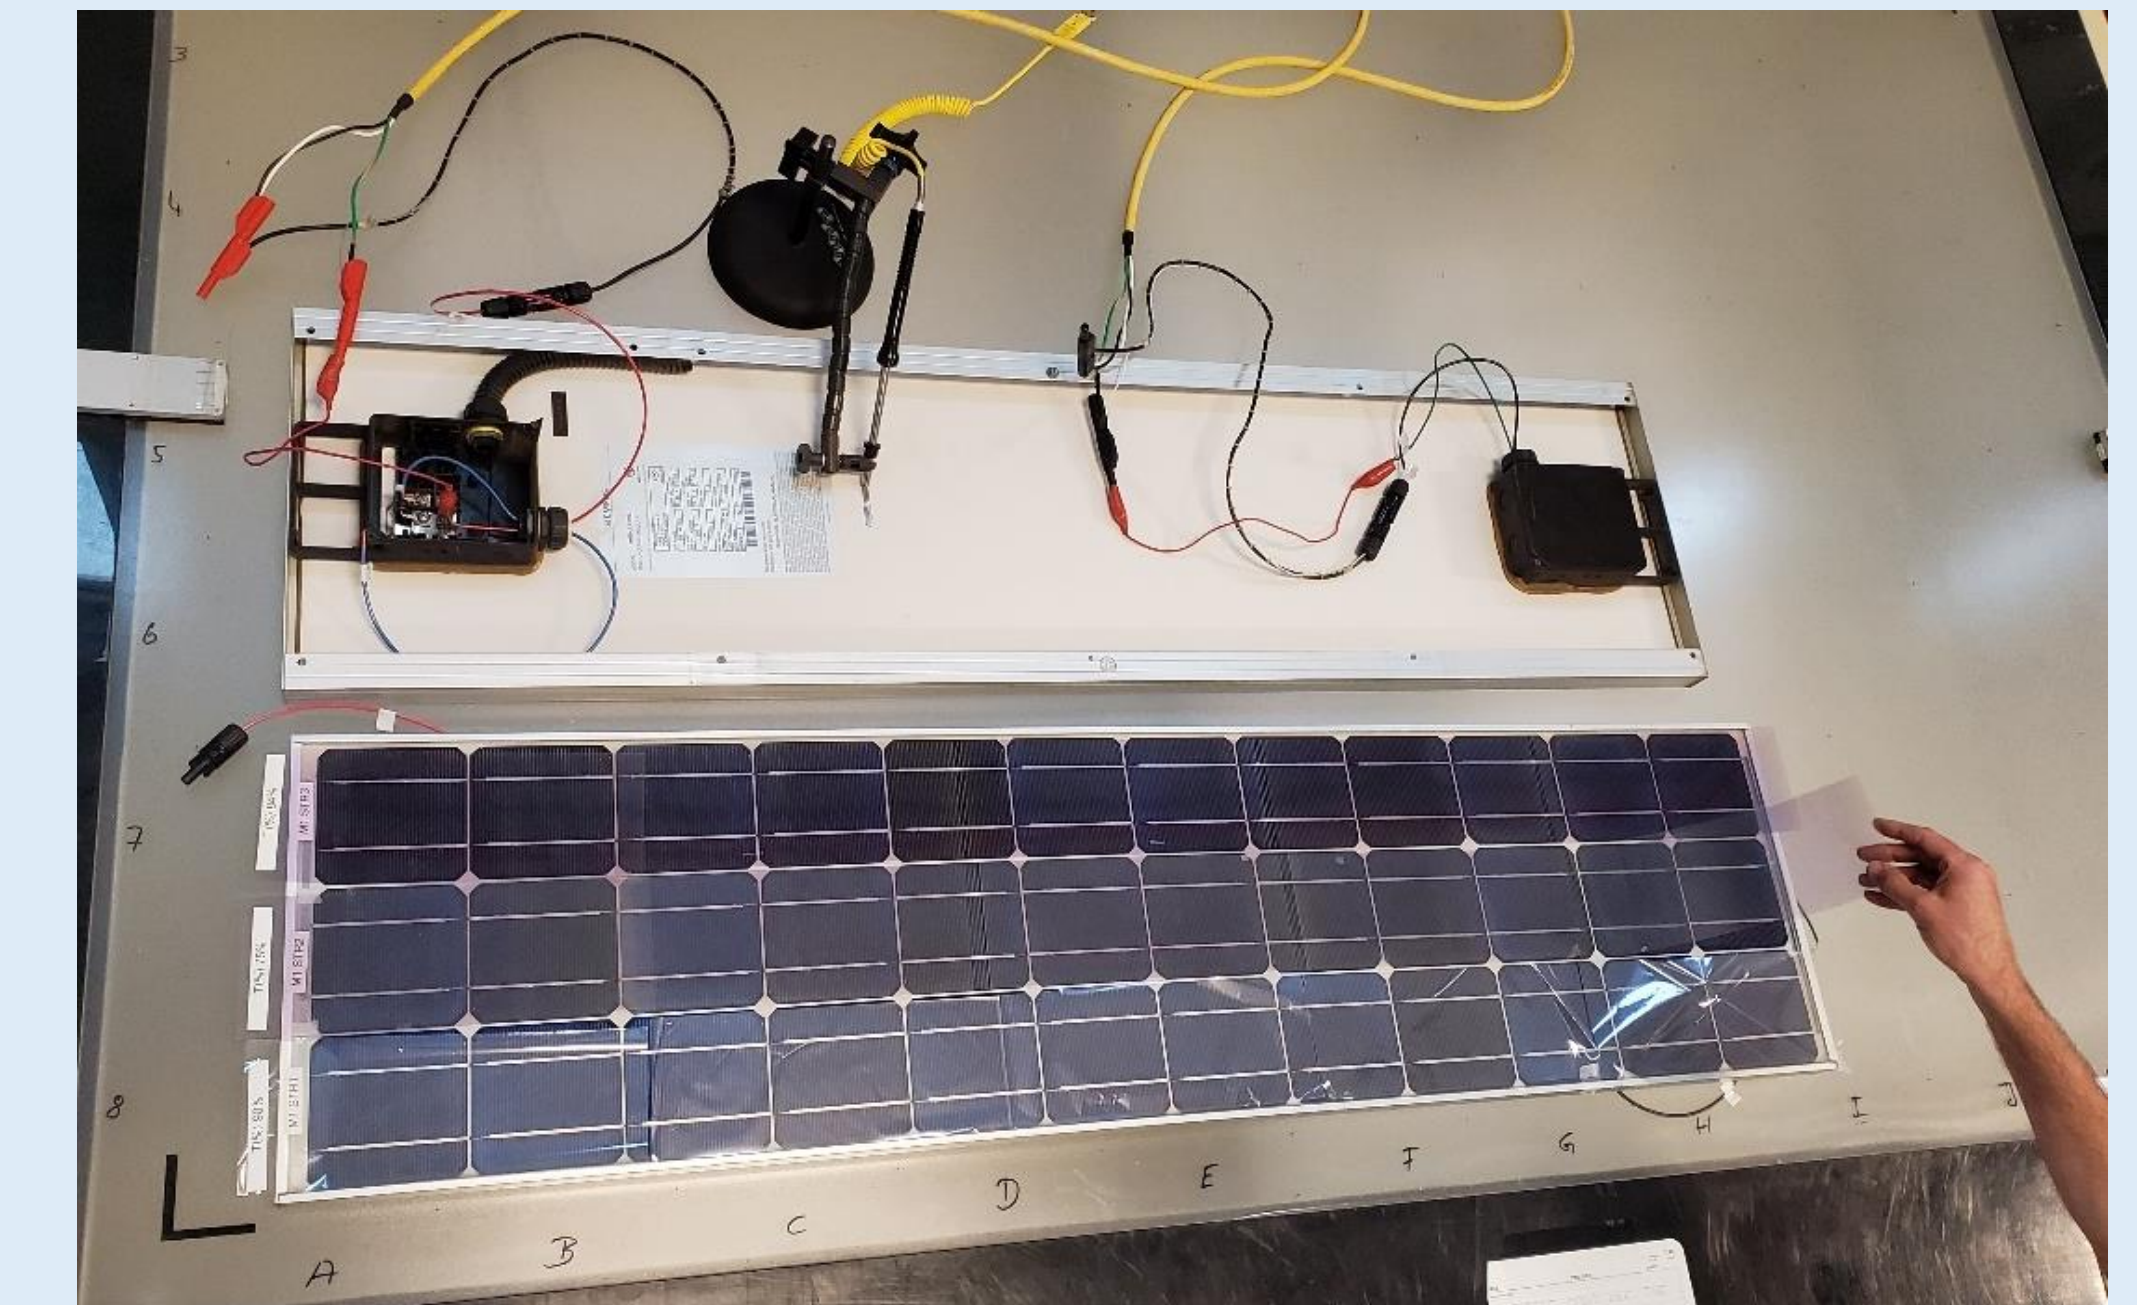

A Spire 4600 long-pulse flash I-V curve simulator was used, along with two Siemens SM55 36-cell monocrystalline modules (mono-facial, FF = 0.7) to investigate the effect of irradiance mismatch using filters to achieve artificial shading.

Test#	M1_str1 (%)	M1_str2 (%)	M1_str3 (%)	M2_str1 (%)	M2_str2 (%)	M2_str3 (%)
0	-	-	-	-	-	-
1	90	-	84	-	-	-
2	90	-	84	-	-	90
3	90	7	84	-	-	90
4	90	75	84	70	-	90
5	64	75	84	70	-	90

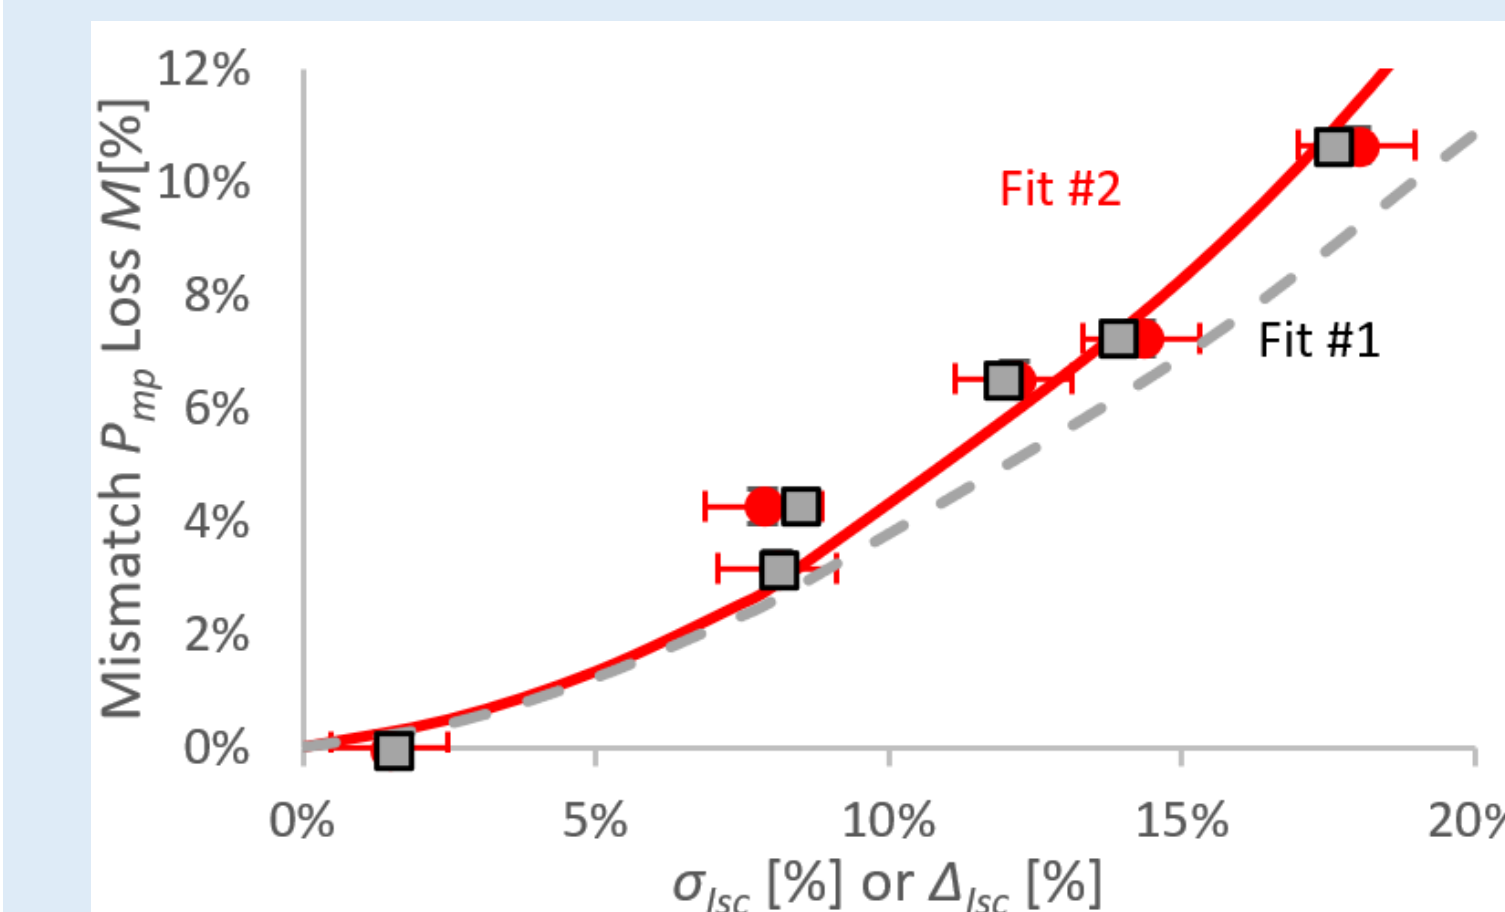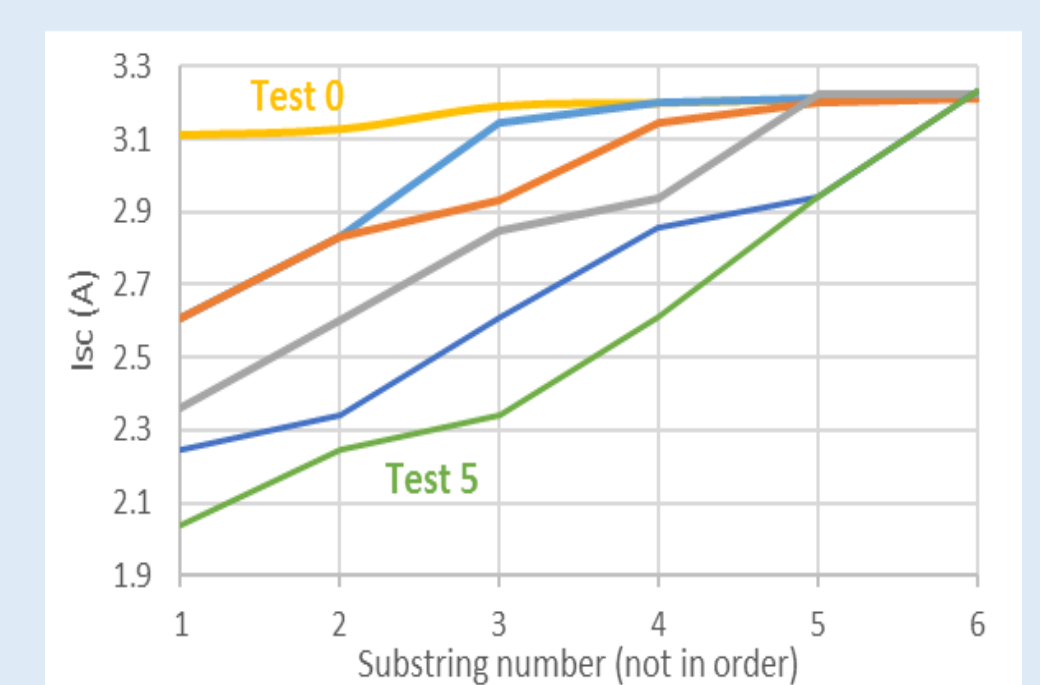

Measured mismatch loss M [%] for each of the shading tests vs σ_{Isc} or Δ_{Isc} which have similar value in this experiment. Empirical models shown for comparison using the same coefficients given in Fit 1 and 2, adjusted for FF.

Application to Performance Models


Mismatch loss factors for bifacial or monofacial simulations are considered by a single annual DC loss factor X, applied after array power is calculated. This value is often $\sim 10x$ higher than system-level mismatch numbers shown here.

$$P_0 = (G_{F0} + G_{R0} \cdot \phi) \cdot \eta_0$$

$$P_1 = (G_{F0} + G_{R0} \cdot \phi) \cdot \eta_0 \cdot (1 - M)$$

$$P_1 = (G_{F0} + (1 - L_{Rear})G_{R0} \cdot \phi) \cdot \eta_0$$

$$L_{Rear} = \frac{M}{BG} + M \quad L_{Rear} = L_{inherent \ Mismatch} + L_{structural \ Shading}$$

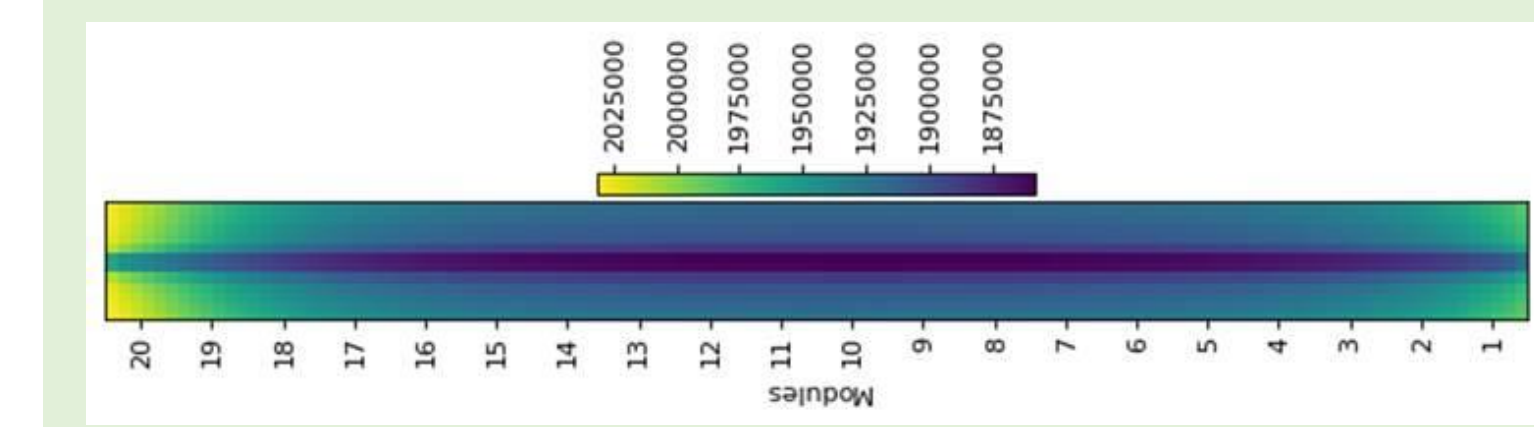

Future steps: explore edge effects on additional mismatch losses. (i.e. 6% annually for HSAT case at 0.75 H.)

MORE DETAILS:
Deline, C., Ayala Peláez, S., MacAlpine, S., Olalla, C. «Estimating and Parameterizing Mismatch Power Loss in Bifacial Photovoltaic Systems», (submitted PinPV)
Deline, C., Ayala Peláez, S., MacAlpine, S., Olalla, C. «Bifacial PV System Mismatch Loss Estimation and Parameterization», 36th EU PVSEC, Marseille FR.
Presentation slides available on: <https://www.nrel.gov/docs/fy19osti/74885.pdf>